Technical data


23248EMKD1


Double row spherical roller bearings

ULTAGE



Visual(s)

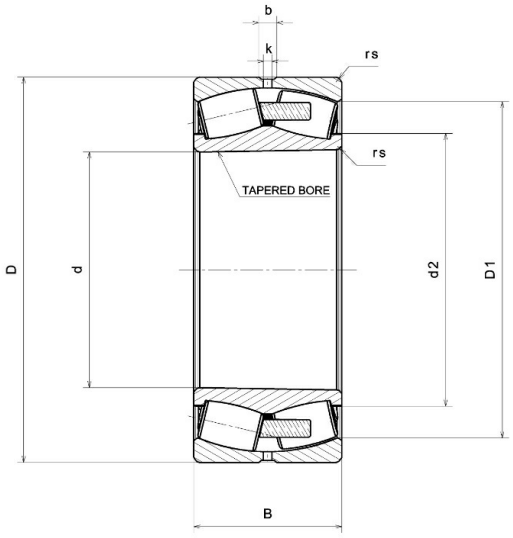

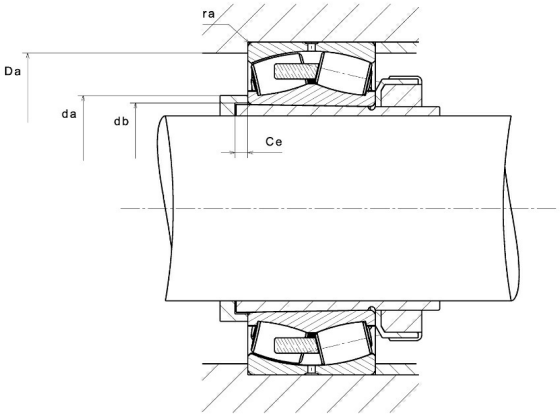

Product definition

d	240 mm
D	440 mm
B	160 mm
d2	284 mm
D1	372 mm
rs min	4 mm
Number of lubrication holes	8
b	20 mm
k	12 mm
Associated sleeve reference	H2348H
e	0.36
Y1	1.86
Y2	2.77
Y0	1.82
Radial clearance class	CN
Brand	NTN

Product performance

Dynamic load, C	3,140 kN
Static load, C0	4,260 kN
Fatigue limit load, Cu	156 kN
Nlim (oil)	1,090 Tr/min
Nlim (grease)	850 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.71 Hz
Characteristic outer ring frequency, BPF0	8.15 Hz
Characteristic inner ring frequency, BPFI	10.85 Hz

Abutment dimensions

da min	257 mm
db min	257 mm
Ce min	6 mm
Da max	423 mm
ra max	4 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .