

# Technical data

## CRV16XLL/3AS

Cam follower with shaft



## Visual(s)

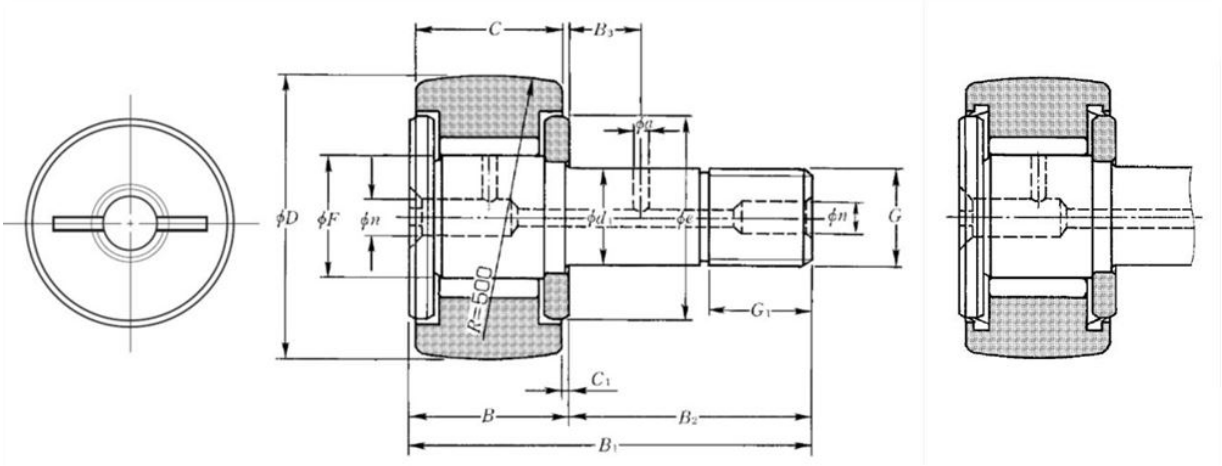


## Product definition

| | |
|---|---|
| **D** | 25.4 mm |
| **d1** | 11.11 mm |
| **C** | 15.88 mm |
| **F** | 14 mm |
| **B** | 17.4 mm |
| **B1** | 43 mm |
| **B2** | 25.4 mm |
| **G** | 7/16-20UNF |
| **G1** | 12.7 mm |
| **B3** | 6.35 mm |
| **C1** | 0.8 mm |
| **n** | 4 mm |
| **a** | 3 mm |
| **e** | 19.5 mm |
| **Dw** | 2 mm |
| **Lw** | 9.8 mm |
| **Maximum tightening torque** | 18 Nm |
| **Bearing with/without cage** | Sans |
| **Mass** | 0.08 kg |
| **Brand** | NTN |

## Product performance

| | |
|---|---|
| **Cr** | 11.7 kN |
| **C0r** | 18.9 kN |
| **Track load capacity cylindrical outer ring** | 7.4 kN |
| **Nlim (grease)** | 7,100 Tr/min |
| **Min operating temperature, Tmin** | -20 °C |
| **Max operating temperature, Tmax** | 100 °C |
| **Characteristic cage frequency, FTF** | 0.44 Hz |
| **Characteristic rolling element frequency, BSF** | 7.88 Hz |
| **Characteristic outer ring frequency, BPF0** | 10.94 Hz |
| **Characteristic inner ring frequency, BPFI** | 14.06 Hz |