


# Technical data

## NA6902R

Needle roller bearing, machined-ring, with inner ring

Needle roller bearing, machined-rings, with inner ring, double-side ribs, lubrication hole

## Visual(s)

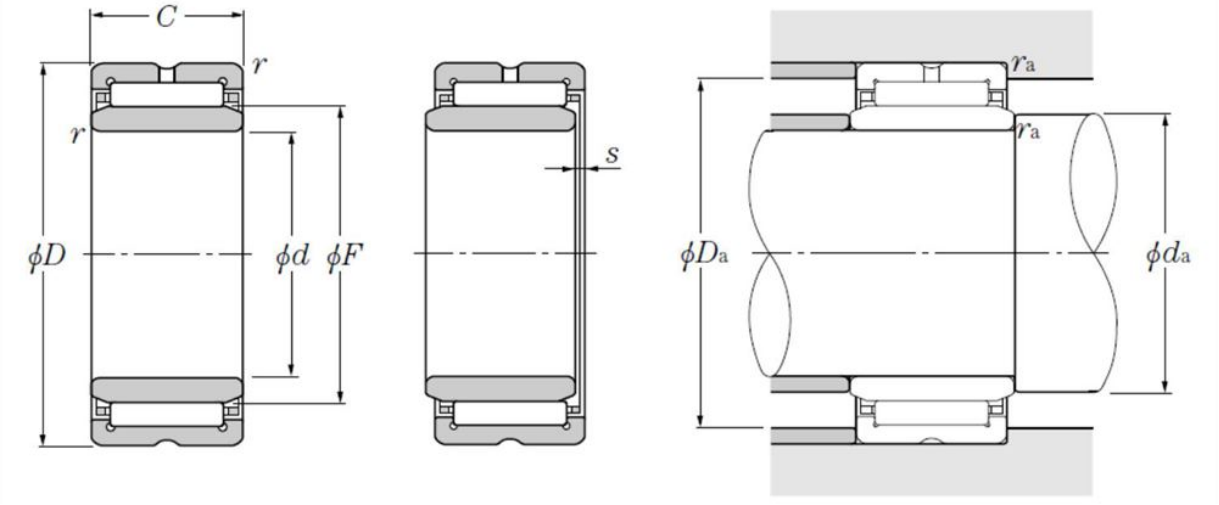


## Product definition

| | |
|---|---|
| **d** | 15 mm |
| **D** | 28 mm |
| **C** | 23 mm |
| **F** | 20 mm |
| **rs min** | 0.3 mm |
| **s max** | 1 mm |
| **Dw** | 2.5 mm |
| **Lw** | 17.8 mm |
| **Lubrication hole on outer ring** | Oui/Yes |
| **k** | 2 mm |
| **Lubrication hole on inner ring** | Non/No |
| **Radial clearance class** | CN |
| **Precision class** | P0 |
| **Mass** | 0.06 kg |
| **Brand** | NTN |

## Product performance

| | |
|---|---|
| **Cr** | 17.6 kN |
| **C0r** | 25.3 kN |
| **Nlim (grease)** | 13,000 Tr/min |
| **Nlim (oil)** | 20,000 Tr/min |
| **Min operating temperature, Tmin** | -20 °C |
| **Max operating temperature, Tmax** | 120 °C |
| **Characteristic cage frequency, FTF** | 0.44 Hz |
| **Characteristic rolling element frequency, BSF** | 8.89 Hz |
| **Characteristic outer ring frequency, BPF0** | 3.56 Hz |
| **Characteristic inner ring frequency, BPFI** | 4.44 Hz |

## Abutment dimensions

| | |
|---|---|
| **da min** | 17 mm |
| **Da max** | 26 mm |
| **ras max** | 0.3 mm |