Technical data


EX308AGR

Insert bearings



zinc-coated insert, spherical outer diameter, fixing by eccentric locking collar, AGR-sealing, for life lubrication

Visual(s)

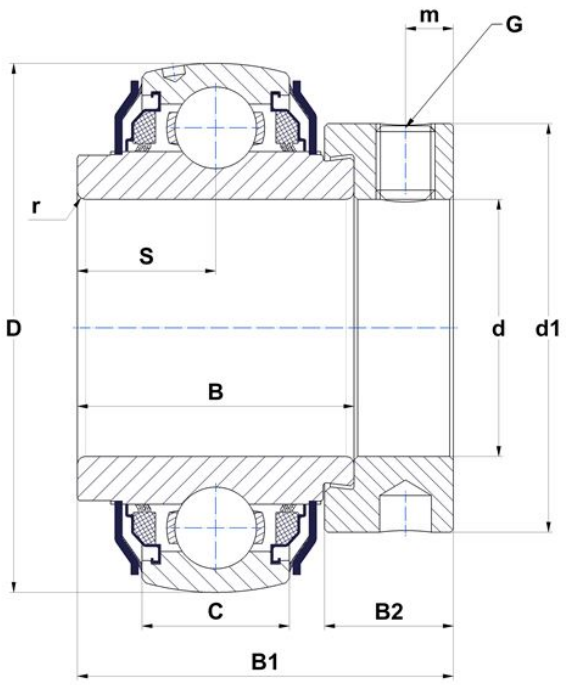

Product definition

B	49.5 mm
B1	65.3 mm
B2	20.6 mm
C	28 mm
d	40 mm
d1	63.5 mm
D	90 mm
G	M10x1,25
m	8 mm
r	2
S	22.2 mm
SW	5 mm

Product performance

C	40.56 kN
C0	24 kN
T min.	-20 °C
T max.	100 °C

Other features

Weight	1.28 kg
Recommended tightening torque for set screw	22 Nm