
Technical datasheet


KMJ20X26X20SV3

Needle roller and cage assemblies



Needle roller bearing, cage assembly, welded cage

Visual(s)

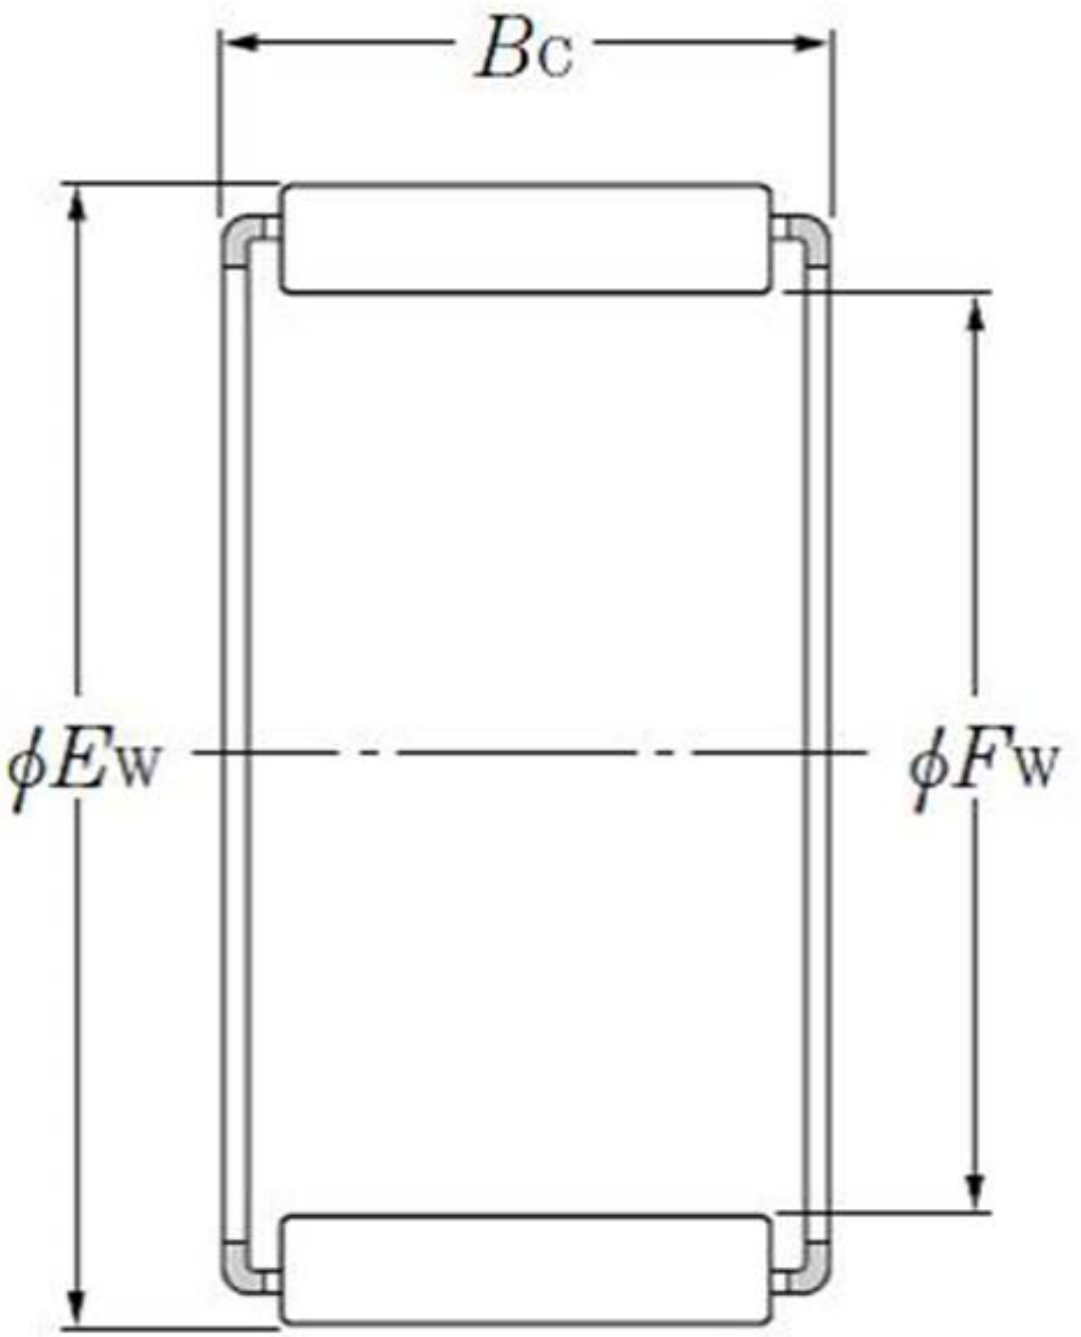

Product definition

Fw	20 mm
Ew	26 mm
Bc	20 mm
Dw	3 mm
Lw	17.6 mm
Mass	0.02 kg
Brand	NTN

Product performance

Cr	20.6 kN
C0r	27.6 kN
Nlim (grease)	13,000 rpm
Nlim (oil)	20,000 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.54 Hz
Characteristic outer ring frequency, BPF0	6.09 Hz
Characteristic inner ring frequency, BPFI	7.91 Hz

Abutment dimensions

b	20 mm