

Technical data

HMK3026LL/3AS

Drawn cup needle roller bearings, opened end



Visual(s)

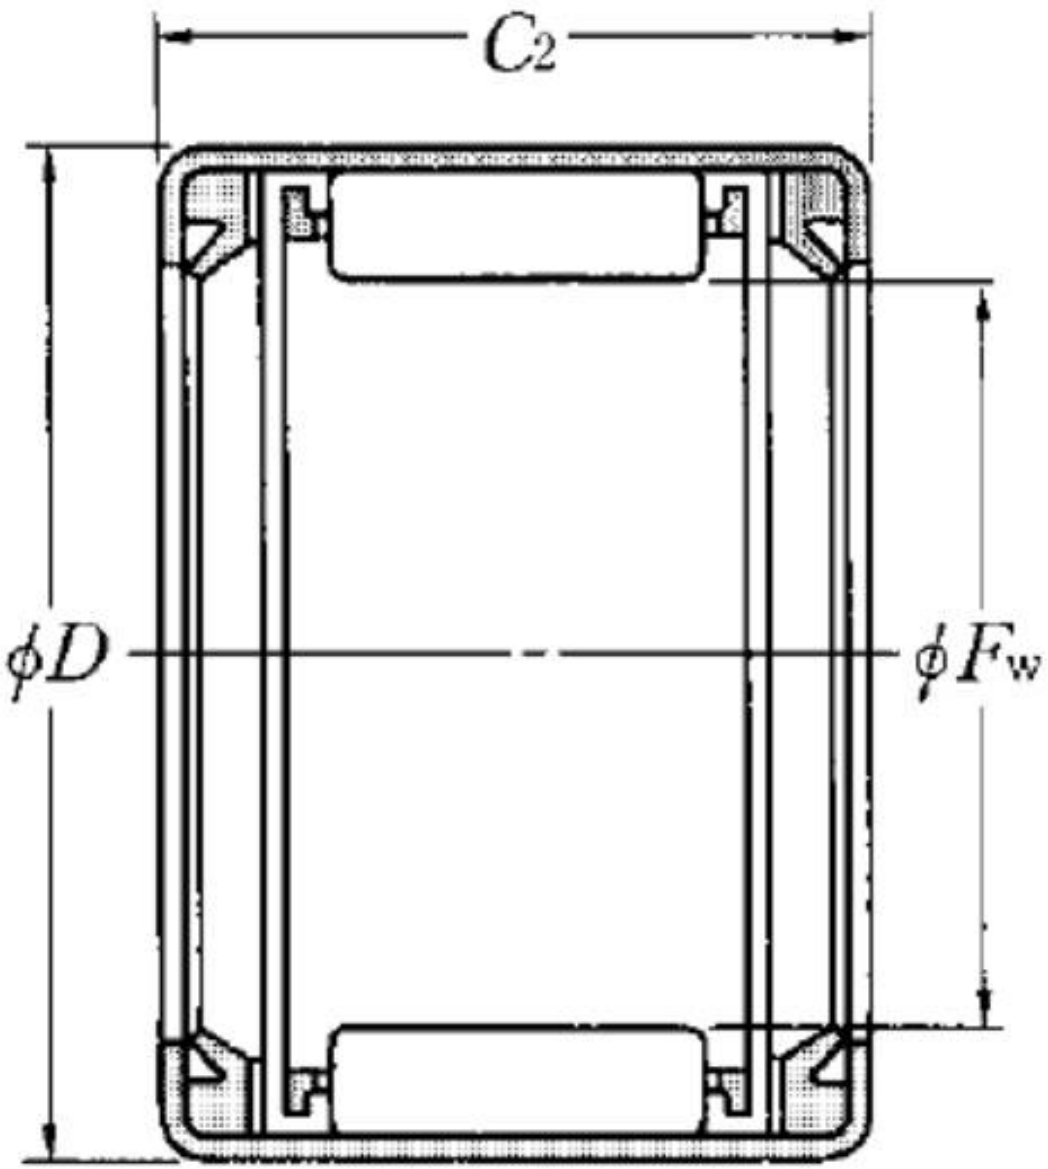

Product definition

Fw	30 mm
D	40 mm
C2	26 mm
Dw	3.5 mm
Lw	14.5 mm
Lubrication hole on outer ring	Non/No
Inner ring reference	IR25X30X26.5
Mass	0.06 kg

Product performance

Cr	24.2 kN
C0r	34.5 kN
Nlim (grease)	5,500 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	100 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	9.47 Hz
Characteristic outer ring frequency, BPF0	8.06 Hz
Characteristic inner ring frequency, BPFI	9.94 Hz