
# Technical data


## EXPE213

Bearing units



grey cast housing, radial insert ball bearing with eccentric locking collar, seal with slinger

## Visual(s)

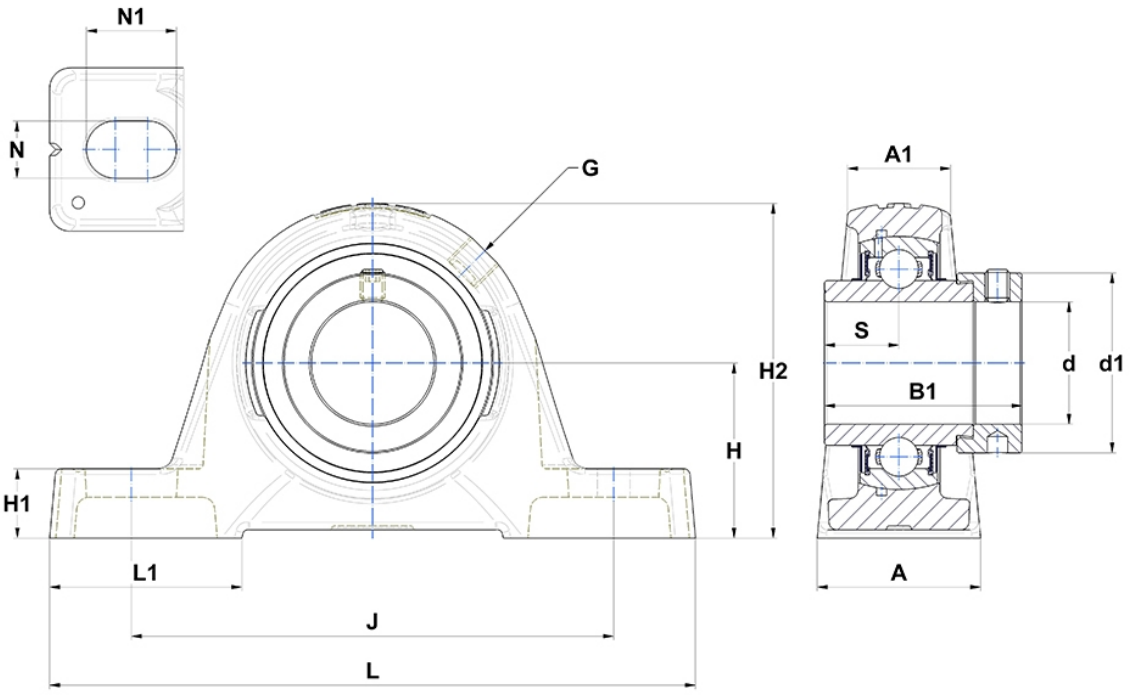

## Product definition

| | |
|---|---|
| **A** | 65 mm |
| **A1** | 44 mm |
| **B** | 68.2 mm |
| **B1** | 85.7 mm |
| **d** | 65 mm |
| **d1** | 86 mm |
| **G** | R1/8" |
| **H** | 79.4 mm |
| **H1** | 27.5 mm |
| **H2** | 156 mm |
| **J** | 203 mm |
| **L** | 260 mm |
| **L1** | 77 mm |
| **N** | 22mm |
| **N1** | 28 mm |
| **s1** | 57.6 mm |
| **S** | 34.1 mm |

## Product performance

| | |
|---|---|
| **C** | 57.2 kN |
| **C0** | 40 kN |
| **T min.** | -20 °C |
| **T max.** | 100 °C |

## Other features

| | |
|---|---|
| **Weight** | 6.91 kg |
| **Recommended tightening torque for set screw** | 22 Nm |
| **Designation of housing** | PE213- |
| **Designation of bearing** | EX213G2 |