
Technical data

6219.EEC3


Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides

ULTAGE

Visual(s)

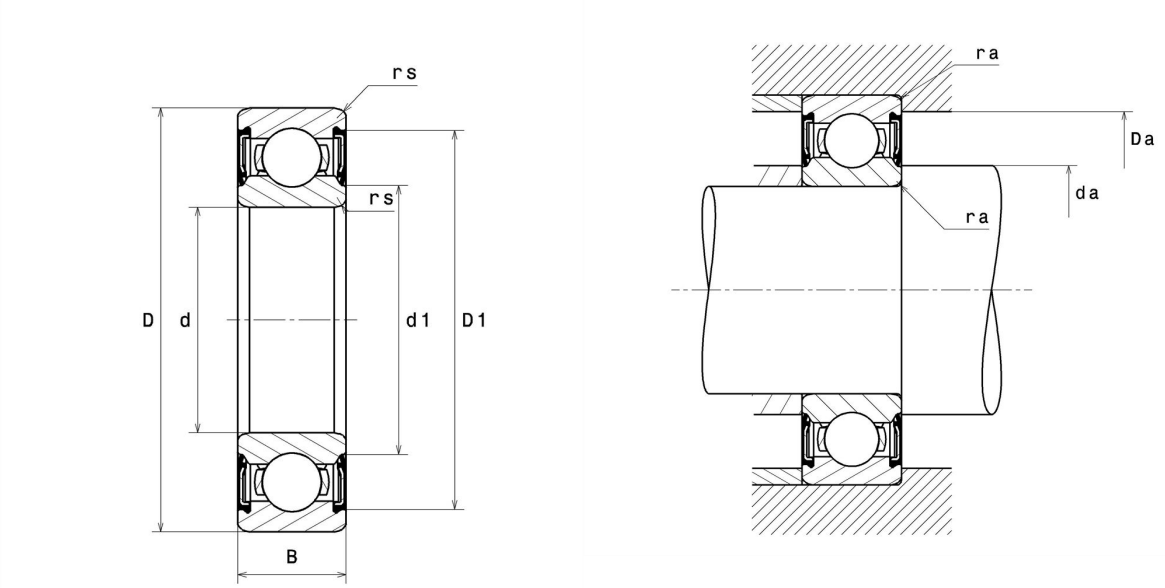

Product definition

d	95 mm
D	170 mm
B	32 mm
d1	111.3 mm
D1	153.3 mm
a min	0 mm
rs min	2.1 mm
rNs min	0 mm
Radial clearance class	C3
Mass	2.65 kg
Brand	SNR

Product performance

Dynamic load, C	0 kN
Static load, C0	81.9 kN
Fatigue limit load, Cu	3.25 kN
f0	14.5
Nref	0 Tr/min
Nlim	2,600 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.38 Hz
Characteristic outer ring frequency, BPF0	4.1 Hz
Characteristic inner ring frequency, BPFI	5.9 Hz

Abutment dimensions

da min	106 mm
da max	111.3 mm
db min	0 mm
Ce min	0 mm
Da max	159 mm
ra max	2 mm
rNa max	0 mm
Db min	0 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr