
Technical data


6320.ZZ

Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, shields on both sides

Visual(s)

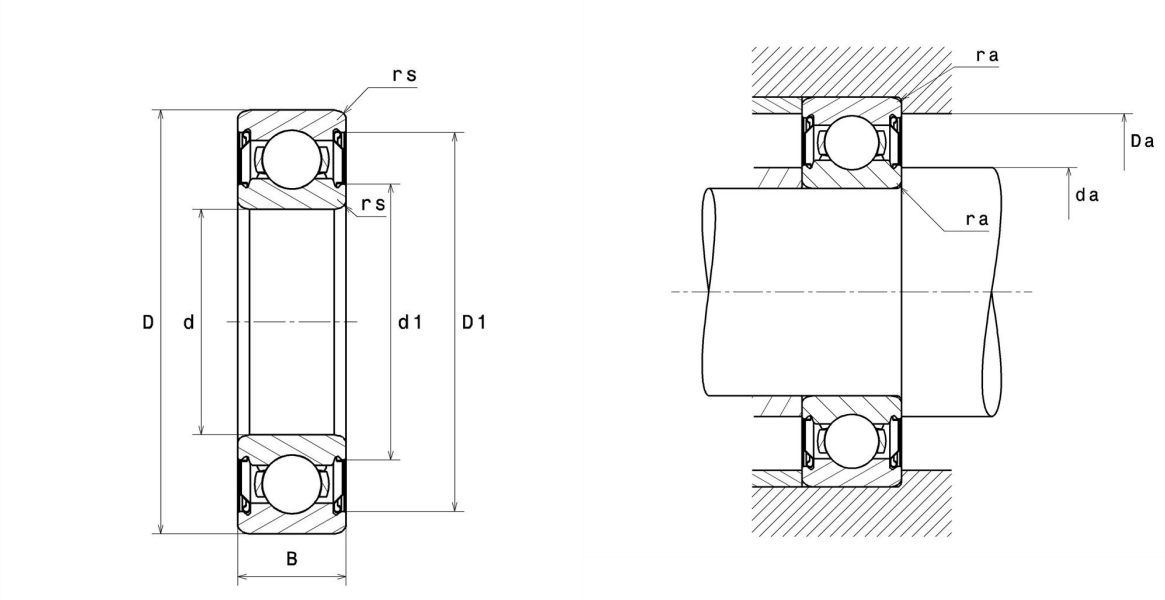

Product definition

d	100 mm
D	215 mm
B	47 mm
d1	127 mm
D1	189.1 mm
rs min	3 mm
Radial clearance class	CN
Mass	7 kg
Brand	SNR

Product performance

Dynamic load, C	172 kN
Static load, C0	141 kN
Fatigue limit load, Cu	6.6 kN
f0	13.3
Nref	4,600 Tr/min
Nlim	4,100 Tr/min
Min operating temperature, Tmin	-25 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	4.12 Hz
Characteristic outer ring frequency, BPF0	3.08 Hz
Characteristic inner ring frequency, BPFI	4.92 Hz

Abutment dimensions

da min	113 mm
da max	127 mm
Ce min	0 mm
Da max	202 mm
ra max	2.5 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr