Technical data


6321LLUC3/5K

Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, contact seals on both sides

Visual(s)

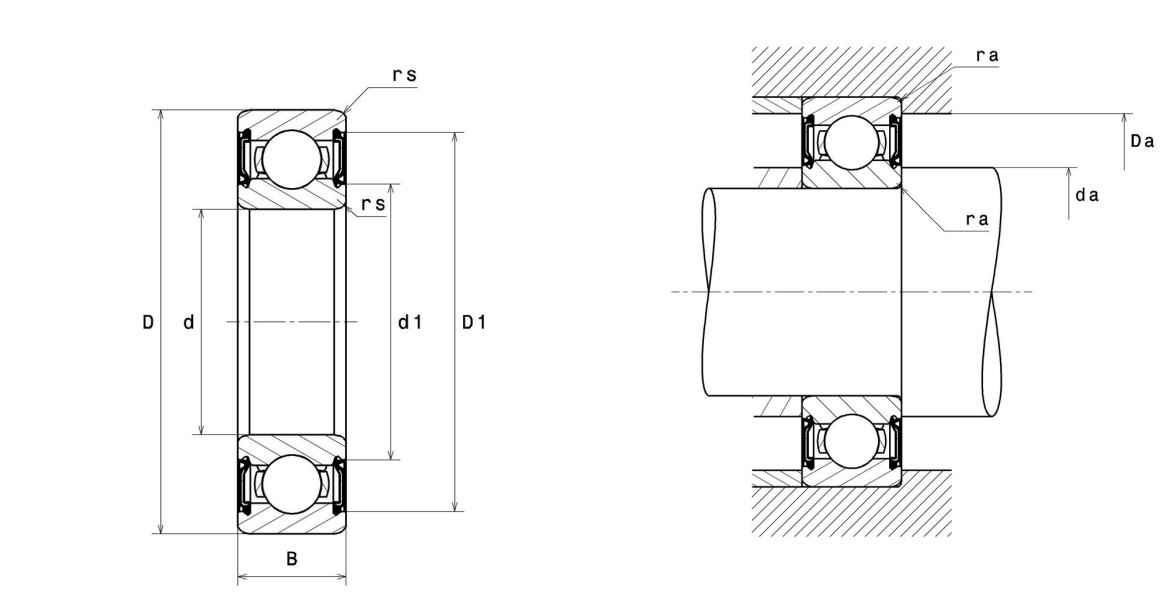

Product definition

d	105 mm
D	225 mm
B	49 mm
rs min	3 mm
Radial clearance class	C3
Mass	8.05 kg
Brand	NTN

Product performance

Dynamic load, C	184 kN
Static load, C0	153 kN
Fatigue limit load, Cu	5.4 kN
f0	13.2
Nlim (grease)	2,100 Tr/min
Min operating temperature, Tmin	-25 °C
Max operating temperature, Tmax	110 °C
Characteristic cage frequency, FTF	0.38 Hz
Characteristic rolling element frequency, BSF	4.1 Hz
Characteristic outer ring frequency, BPF0	3.08 Hz
Characteristic inner ring frequency, BPFI	4.92 Hz

Abutment dimensions

da min	118 mm
Da max	212 mm
ra max	2.5 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr