Technical data


23152EMKD1C3


Double row spherical roller bearings

ULTAGE



Visual(s)

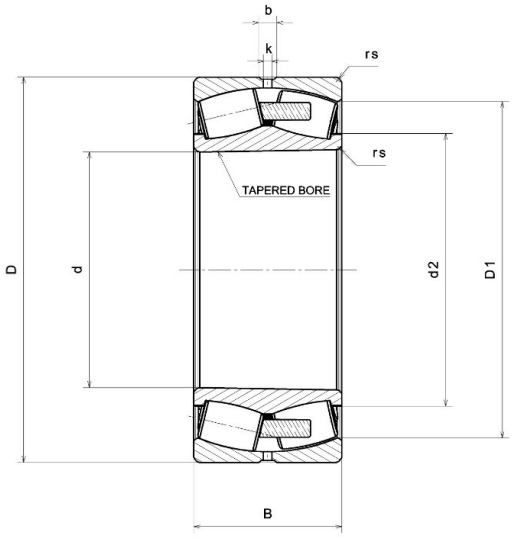

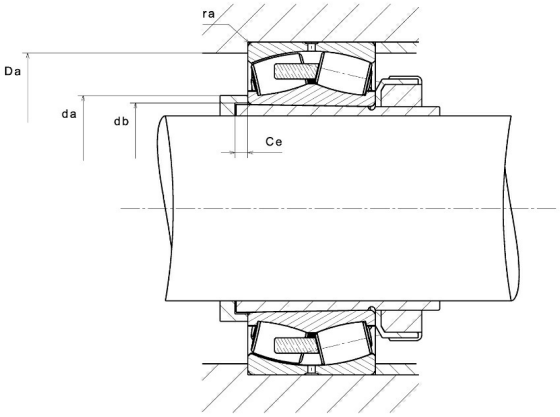

Product definition

d	260 mm
D	440 mm
B	144 mm
d2	302 mm
D1	380 mm
rs min	4 mm
Number of lubrication holes	8
b	20 mm
k	12 mm
Associated sleeve reference	H3152H
e	0.31
Y1	2.15
Y2	3.2
Y0	2.1
Radial clearance class	C3
Brand	NTN

Product performance

Dynamic load, C	2,780 kN
Static load, C0	4,020 kN
Fatigue limit load, Cu	160 kN
Nlim (oil)	1,090 Tr/min
Nlim (grease)	860 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.92 Hz
Characteristic outer ring frequency, BPF0	9.66 Hz
Characteristic inner ring frequency, BPFI	12.34 Hz

Abutment dimensions

da min	277 mm
db min	276 mm
Ce min	11 mm
Da max	423 mm
ra max	4 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .