# Technical data


## 23248EMKD1C3


Double row spherical roller bearings

ULTAGE



## Visual(s)

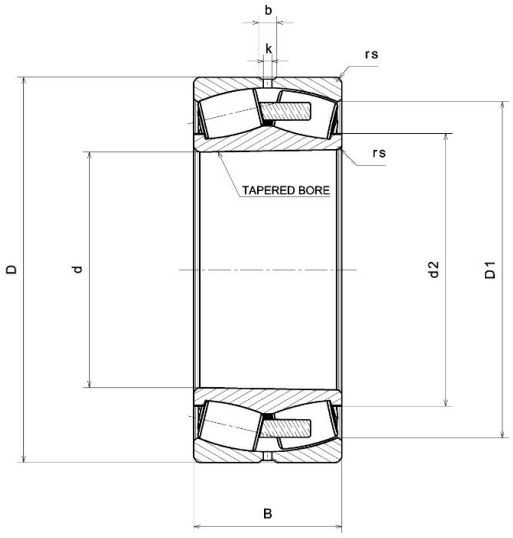

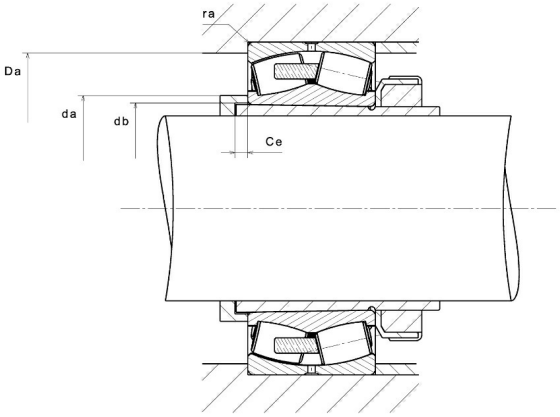
## Product definition

| | |
|---|---|
| **d** | 240 mm |
| **D** | 440 mm |
| **B** | 160 mm |
| **d2** | 284 mm |
| **D1** | 372 mm |
| **rs min** | 4 mm |
| **Number of lubrication holes** | 8 |
| **b** | 20 mm |
| **k** | 12 mm |
| **Associated sleeve reference** | H2348H |
| **e** | 0.36 |
| **Y1** | 1.86 |
| **Y2** | 2.77 |
| **Y0** | 1.82 |
| **Radial clearance class** | C3 |
| **Brand** | NTN |

## Product performance

| | |
|---|---|
| **Dynamic load, C** | 3,140 kN |
| **Static load, C0** | 4,260 kN |
| **Fatigue limit load, Cu** | 156 kN |
| **Nlim (oil)** | 1,090 Tr/min |
| **Nlim (grease)** | 850 Tr/min |
| **Min operating temperature, Tmin** | -40 °C |
| **Max operating temperature, Tmax** | 200 °C |
| **Characteristic cage frequency, FTF** | 0.43 Hz |
| **Characteristic rolling element frequency, BSF** | 6.71 Hz |
| **Characteristic outer ring frequency, BPF0** | 8.15 Hz |
| **Characteristic inner ring frequency, BPFI** | 10.85 Hz |

## Abutment dimensions

| | |
|---|---|
| **da min** | 257 mm |
| **db min** | 257 mm |
| **Ce min** | 6 mm |
| **Da max** | 423 mm |
| **ra max** | 4 mm |

## Calculation factors

### Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

| $Fa/Fr \leq e$ | | $Fa/Fr > e$ | |
|---|---|---|---|
| X | Y | X | Y |
| 1 | Y1 | 0.67 | Y2 |

### Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

| $X_0$ | $Y_0$ |
|---|---|
| 1 | Y0 |

The values for e, Y1, Y2 and Y0 are shown in the above table .