Technical data


24060EMK30D1C3


Double row spherical roller bearings

ULTAGE



Visual(s)

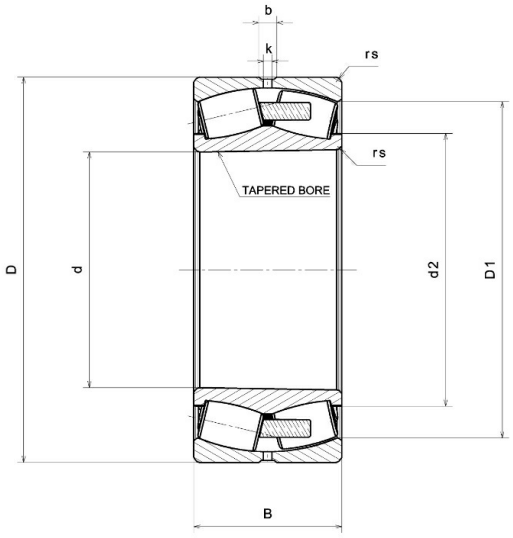

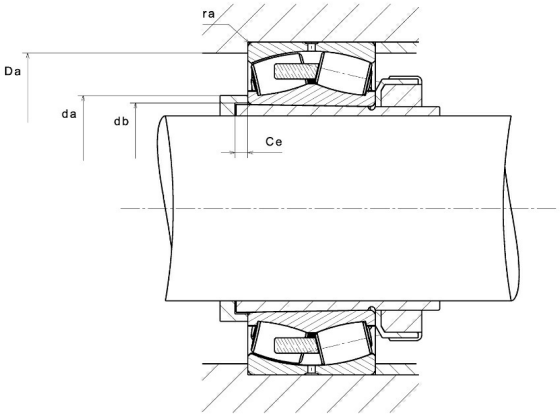

Product definition

d	300 mm
D	460 mm
B	160 mm
d2	332 mm
D1	401 mm
rs min	4 mm
Number of lubrication holes	8
b	20 mm
k	12 mm
e	0.33
Y1	2.04
Y2	3.04
Y0	2
Radial clearance class	C3
Brand	NTN

Product performance

Dynamic load, C	3,150 kN
Static load, C0	5,190 kN
Fatigue limit load, Cu	166 kN
Nlim (oil)	970 Tr/min
Nlim (grease)	760 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	200 °C
Characteristic cage frequency, FTF	0.45 Hz
Characteristic rolling element frequency, BSF	9.42 Hz
Characteristic outer ring frequency, BPF0	11.67 Hz
Characteristic inner ring frequency, BPFI	14.33 Hz

Abutment dimensions

da min	315 mm
Da max	445 mm
ra max	4 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa/Fr \leq e$		$Fa/Fr > e$	
X	Y	X	Y
1	Y1	0.67	Y2

Equivalent static radial load

$P_0 = X_0.Fr + Y_0.Fa$

X_0	Y_0
1	Y0

The values for e, Y1, Y2 and Y0 are shown in the above table .