Technical data


30202


Single row tapered roller bearings

Tapered roller bearing, pressed steel cage



Visual(s)

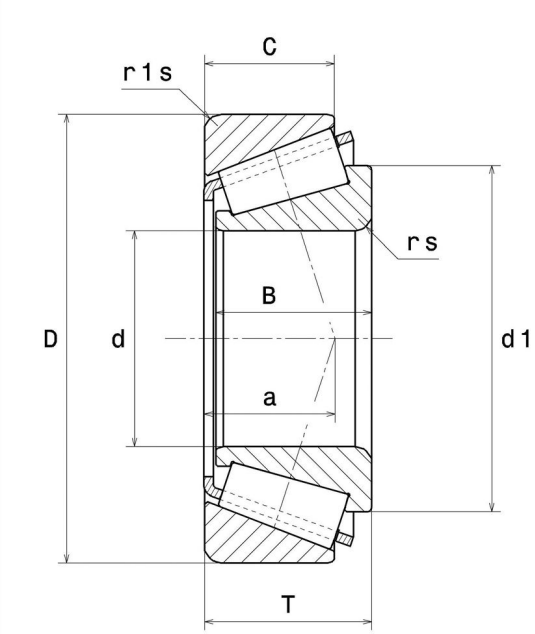

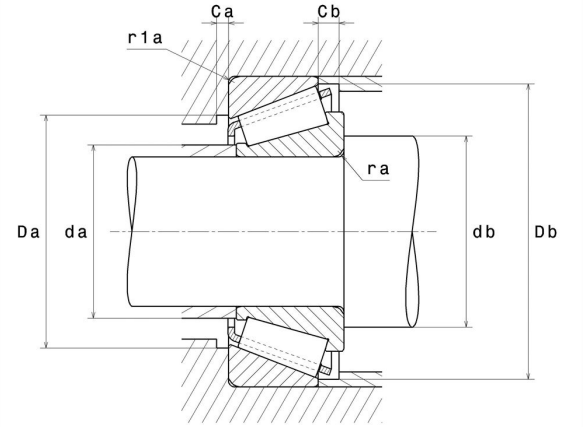

Product definition

d	15 mm
D	35 mm
B	11 mm
C	10 mm
T	11.75 mm
a	8.5 mm
rs min	0.6 mm
r1s min	0.6 mm
e	0.35
Y2	1.75
Y0	0.95
Mass	0.05 kg
Brand	NTN

Product performance

Dynamic load, C	13.4 kN
Rating life coefficient, A2	1
Static load, C0	12.3 kN
Nlim (oil)	15,000 Tr/min
Nlim (grease)	11,000 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.32 Hz
Characteristic outer ring frequency, BPF0	4.94 Hz
Characteristic inner ring frequency, BPFI	7.06 Hz

Abutment dimensions

da max	19.5 mm
db min	20.5 mm
Da min	28.5 mm
Da max	30.5 mm
Db min	33 mm
ra max	0.6 mm
r1a max	0.6 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If Po <Fr, then use Po = Fr

The values for e, Y2 and Y0 are shown in the above table