Technical data


30214U


Single row tapered roller bearings

Tapered roller bearing, pressed steel cage



Visual(s)

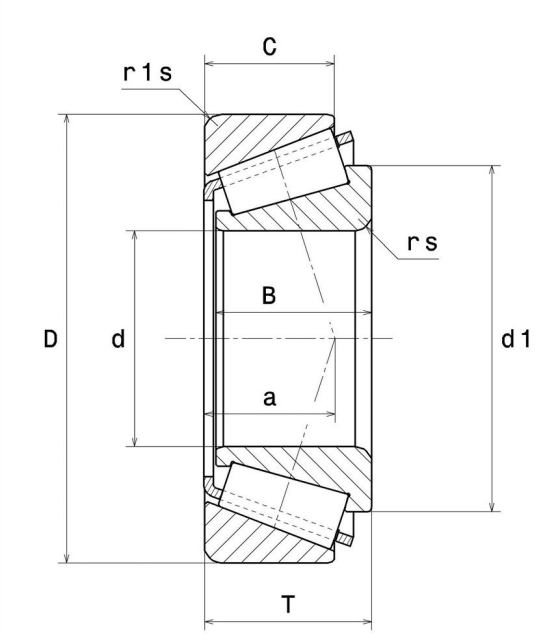

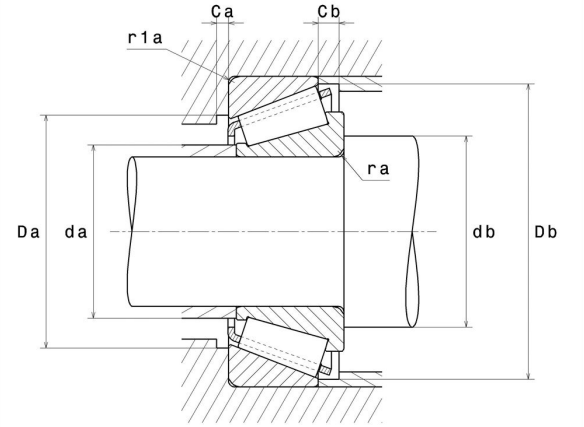

Product definition

d	70 mm
D	125 mm
B	24 mm
C	21 mm
T	26.25 mm
d1	95 mm
a	25.5 mm
rs min	2 mm
r1s min	1.5 mm
e	0.42
Y2	1.43
Y0	0.79
Mass	1.26 kg
ISO 355 reference	T3EB070
Brand	NTN

Product performance

Dynamic load, C	131 kN
Rating life coefficient, A2	1
Static load, C0	162 kN
Fatigue limit load, Cu	19.8 kN
Nlim (oil)	3,900 Tr/min
Nlim (grease)	2,900 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.63 Hz
Characteristic outer ring frequency, BPF0	8.58 Hz
Characteristic inner ring frequency, BPFI	11.42 Hz

Abutment dimensions

da max	81 mm
db min	80 mm
Da min	110 mm
Da max	116.5 mm
Db min	118 mm
Ca min	4 mm
Cb min	5 mm
ra max	2 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa / Fr \leq e$		$Fa / Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table