Technical data


32910


Single row tapered roller bearings

Tapered roller bearing, pressed steel cage



Visual(s)

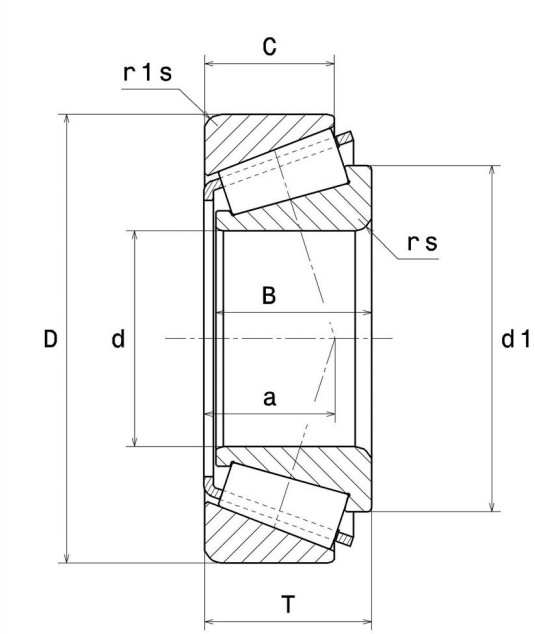

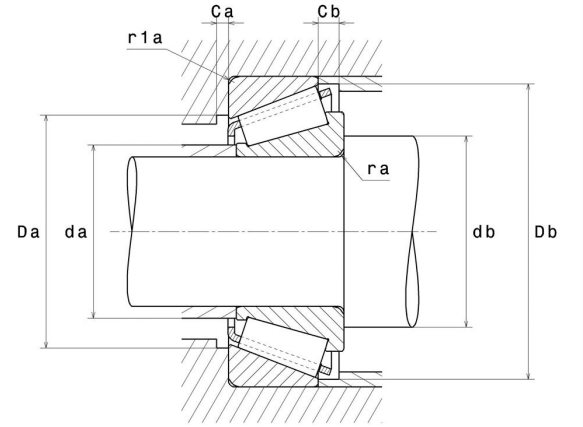

Product definition

d	50 mm
D	72 mm
B	14 mm
C	12 mm
T	15 mm
d1	61.5 mm
a	13.5 mm
rs min	0.6 mm
r1s min	0.6 mm
e	0.34
Y2	1.76
Y0	0.97
Mass	0.19 kg
ISO 355 reference	T2BC050
Brand	NTN

Product performance

Dynamic load, C	35.5 kN
Rating life coefficient, A2	1
Static load, C0	57 kN
Fatigue limit load, Cu	7 kN
Nlim (oil)	6,300 Tr/min
Nlim (grease)	4,700 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	12.84 Hz
Characteristic outer ring frequency, BPF0	15.25 Hz
Characteristic inner ring frequency, BPFI	17.75 Hz

Abutment dimensions

da max	55 mm
db min	54.5 mm
Da min	63.5 mm
Da max	67.5 mm
Db min	69 mm
Ca min	3 mm
Cb min	3 mm
ra max	0.6 mm
r1a max	0.6 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa / Fr \leq e$		$Fa / Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table