Technical data


32911XU


Single row tapered roller bearings



Tapered roller bearing, pressed steel cage

Visual(s)

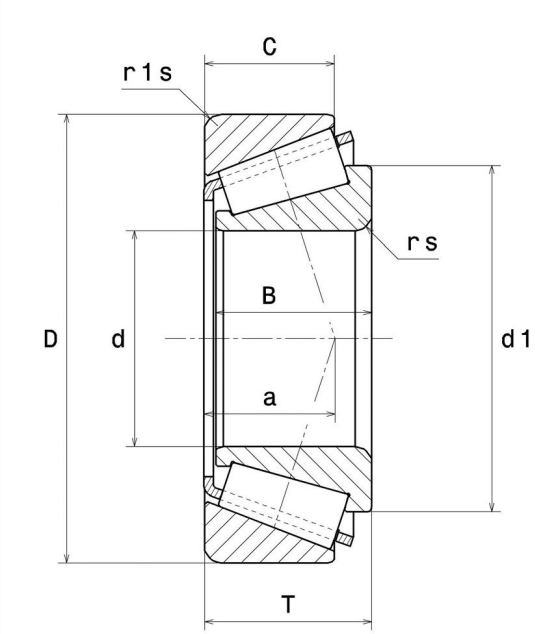

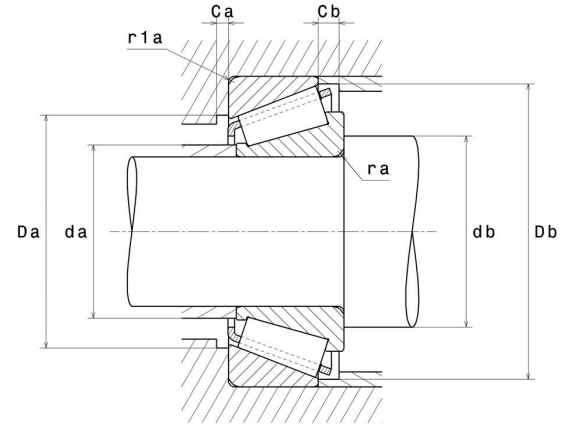

Product definition

d	55 mm
D	80 mm
B	17 mm
C	14 mm
T	17 mm
d1	68 mm
a	14.5 mm
rs min	1 mm
r1s min	1 mm
e	0.31
Y2	1.94
Y0	1.07
Mass	0.27 kg
ISO 355 reference	T2BC055
Brand	NTN

Product performance

Dynamic load, C	44.5 kN
Rating life coefficient, A2	1
Static load, C0	73.5 kN
Fatigue limit load, Cu	9 kN
Nlim (oil)	5,700 Tr/min
Nlim (grease)	4,300 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	12.85 Hz
Characteristic outer ring frequency, BPF0	14.79 Hz
Characteristic inner ring frequency, BPFI	17.21 Hz

Abutment dimensions

da max	60.5 mm
db min	60.5 mm
Da min	70.5 mm
Da max	74.5 mm
Db min	76.5 mm
Ca min	3 mm
Cb min	3 mm
ra max	1 mm
r1a max	1 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa / Fr \leq e$		$Fa / Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table