Technical data


32926


Single row tapered roller bearings

Tapered roller bearing, pressed steel cage



Visual(s)

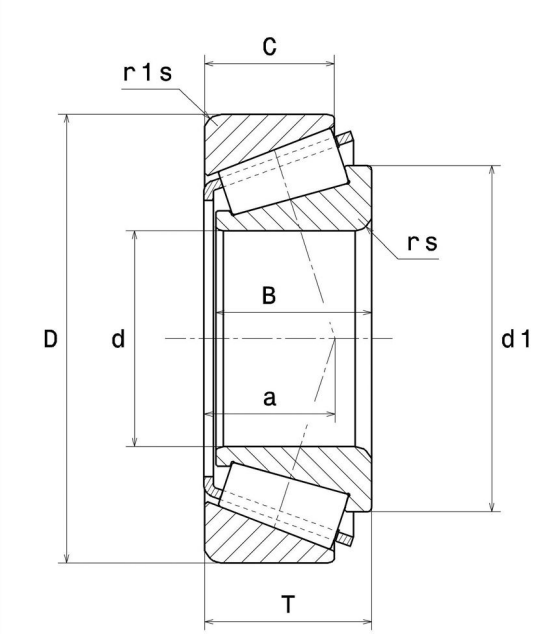

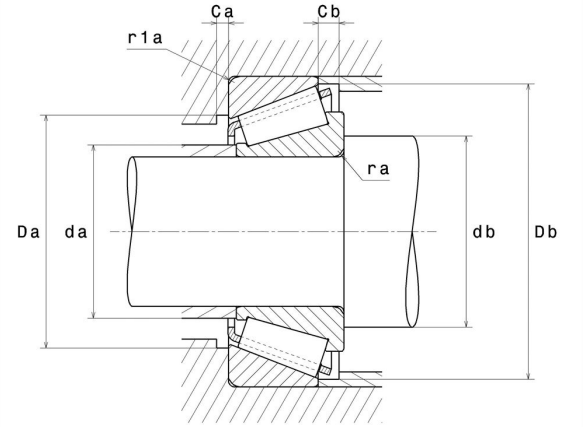

Product definition

d	130 mm
D	180 mm
B	30 mm
C	26 mm
T	32 mm
a	34 mm
rs min	2 mm
r1s min	2 mm
e	0.37
Y2	1.6
Y0	0.88
Mass	2.22 kg
Brand	NTN

Product performance

Dynamic load, C	142 kN
Rating life coefficient, A2	1
Static load, C0	252 kN
Nlim (oil)	2,400 Tr/min
Nlim (grease)	1,800 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da max	140 mm
db min	142.5 mm
Da min	161.5 mm
Da max	170 mm
Db min	174 mm
Ca min	6 mm
Cb min	6 mm
ra max	2 mm
r1a max	2 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

Fa / Fr ≤ e		Fa / Fr > e	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If Po <Fr, then use Po = Fr

The values for e, Y2 and Y0 are shown in the above table