Technical data


33212U


Single row tapered roller bearings

Tapered roller bearing, pressed steel cage



Visual(s)

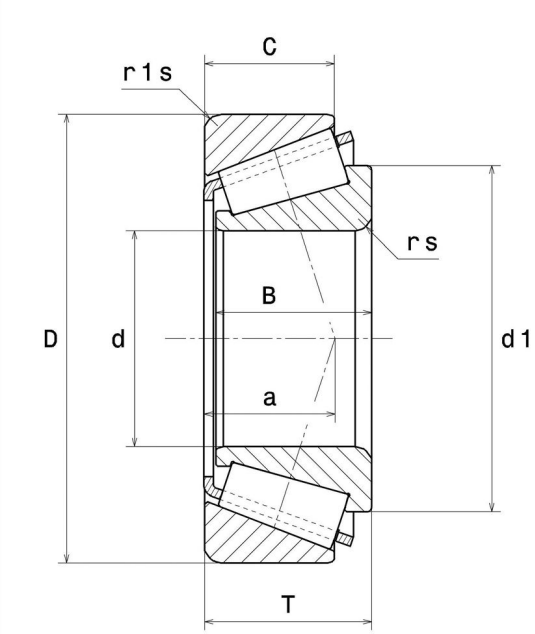

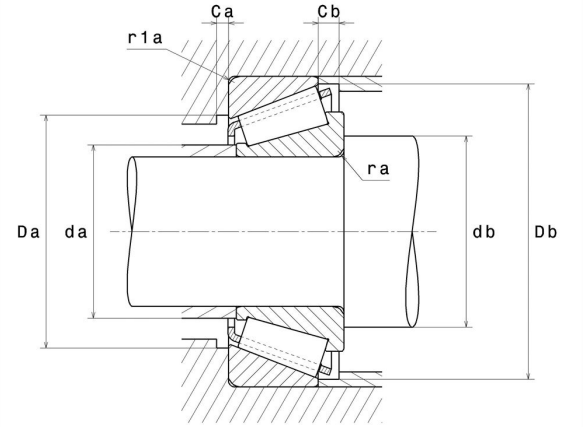

Product definition

d	60 mm
D	110 mm
B	38 mm
C	29 mm
T	38 mm
d1	85.5 mm
a	27.5 mm
rs min	2 mm
r1s min	1.5 mm
e	0.4
Y2	1.48
Y0	0.82
Mass	1.55 kg
ISO 355 reference	T3EE060
Brand	NTN

Product performance

Dynamic load, C	161 kN
Rating life coefficient, A2	1
Static load, C0	223 kN
Fatigue limit load, Cu	27.2 kN
Nlim (oil)	4,500 Tr/min
Nlim (grease)	3,400 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.69 Hz
Characteristic outer ring frequency, BPF0	8.16 Hz
Characteristic inner ring frequency, BPFI	10.84 Hz

Abutment dimensions

da max	69 mm
db min	70 mm
Da min	93 mm
Da max	101.5 mm
Db min	105 mm
Ca min	6 mm
Cb min	9 mm
ra max	2 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa / Fr \leq e$		$Fa / Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table