Technical data


4T-30216


Single row tapered roller bearings



Tapered roller bearing, pressed steel cage

Visual(s)

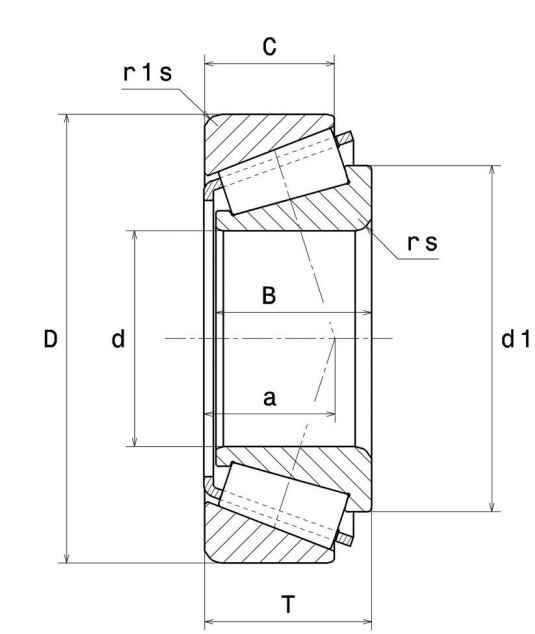

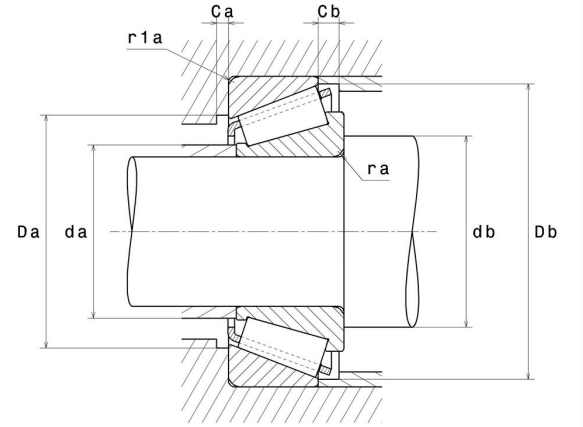

Product definition

d	80 mm
D	140 mm
B	26 mm
C	22 mm
T	28.25 mm
d1	106.5 mm
a	27.5 mm
rs min	2.5 mm
r1s min	2 mm
e	0.42
Y2	1.43
Y0	0.79
Mass	1.72 kg
ISO 355 reference	T3EB080
Brand	NTN

Product performance

Dynamic load, C	160 kN
Rating life coefficient, A2	1.4
Static load, C0	200 kN
Fatigue limit load, Cu	23.8 kN
Nlim (oil)	3,400 Tr/min
Nlim (grease)	2,500 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	6.62 Hz
Characteristic outer ring frequency, BPF0	8.58 Hz
Characteristic inner ring frequency, BPFI	11.42 Hz

Abutment dimensions

da max	91 mm
db min	92 mm
Da min	124 mm
Da max	130 mm
Db min	132 mm
Ca min	4 mm
Cb min	6 mm
ra max	2 mm
r1a max	2 mm