Technical data


4T-30309D


Single row tapered roller bearings



Tapered roller bearing, pressed steel cage

Visual(s)

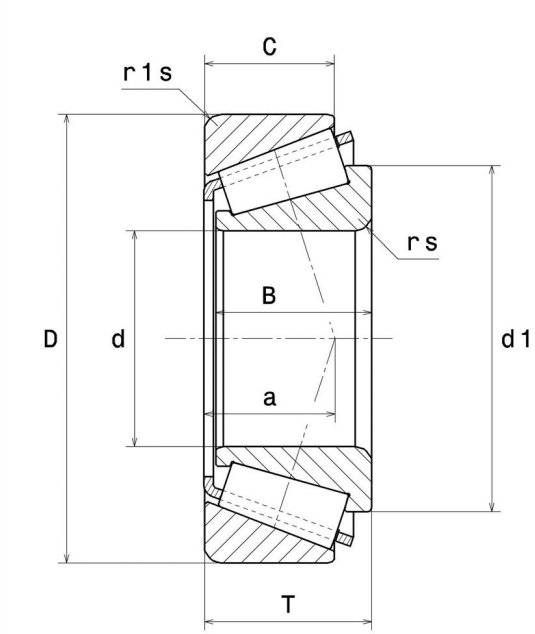

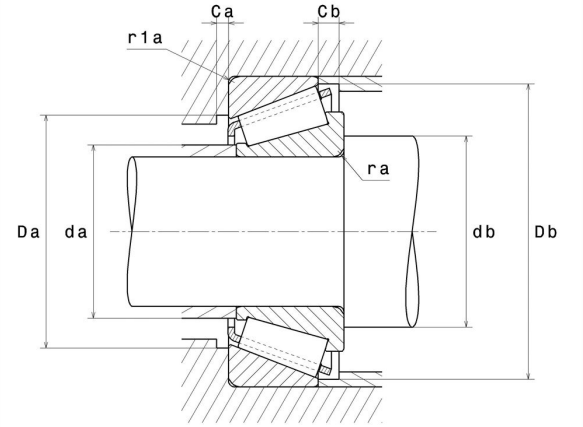

Product definition

d	45 mm
D	100 mm
B	25 mm
C	18 mm
T	27.25 mm
d1	75 mm
a	32.5 mm
rs min	2 mm
r1s min	1.5 mm
e	0.83
Y2	0.73
Y0	0.4
Mass	0.96 kg
ISO 355 reference	T7FB045
Brand	NTN

Product performance

Dynamic load, C	96 kN
Rating life coefficient, A2	1.4
Static load, C0	109 kN
Fatigue limit load, Cu	13.3 kN
Nlim (oil)	4,600 Tr/min
Nlim (grease)	3,500 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	5.52 Hz
Characteristic outer ring frequency, BPF0	6.76 Hz
Characteristic inner ring frequency, BPFI	9.24 Hz

Abutment dimensions

da max	56 mm
db min	55 mm
Da min	79 mm
Da max	91.5 mm
Db min	96 mm
Ca min	3 mm
Cb min	9 mm
ra max	2 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa / Fr \leq e$		$Fa / Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table