Technical data


4T-33111


Single row tapered roller bearings



Tapered roller bearing, pressed steel cage

Visual(s)

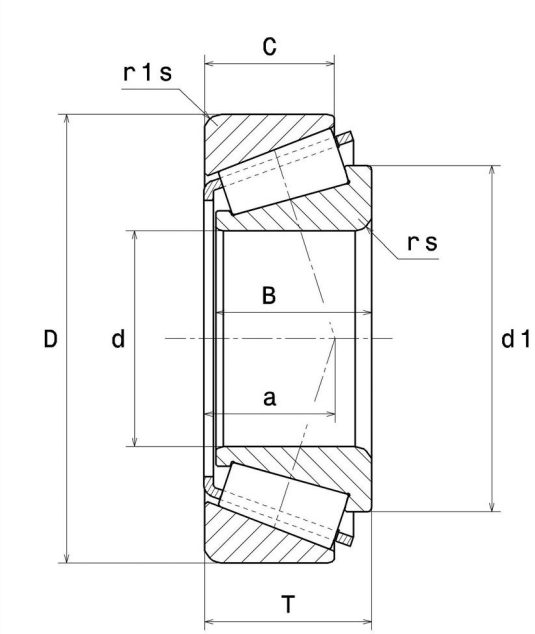

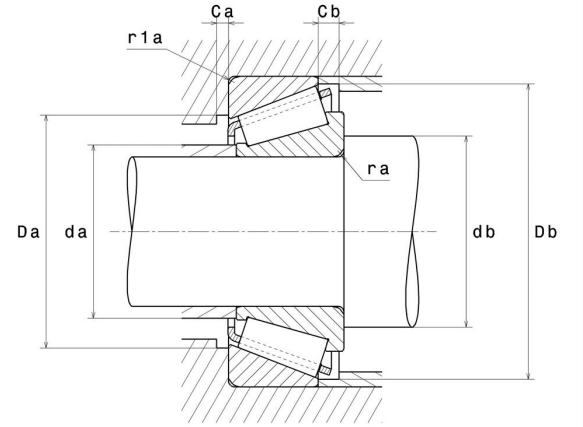

Product definition

d	55 mm
D	95 mm
B	30 mm
C	23 mm
T	30 mm
d1	75.5 mm
a	22 mm
rs min	1.5 mm
r1s min	1.5 mm
e	0.37
Y2	1.6
Y0	0.88
Mass	0.85 kg
ISO 355 reference	T3CE055
Brand	NTN

Product performance

Dynamic load, C	111 kN
Rating life coefficient, A2	1.4
Static load, C0	155 kN
Fatigue limit load, Cu	18.9 kN
Nlim (oil)	5,200 Tr/min
Nlim (grease)	3,900 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.49 Hz
Characteristic outer ring frequency, BPF0	9.16 Hz
Characteristic inner ring frequency, BPFI	11.84 Hz

Abutment dimensions

da max	62 mm
db min	63.5 mm
Da min	83 mm
Da max	86.5 mm
Db min	91 mm
Ca min	5 mm
Cb min	7 mm
ra max	1.5 mm
r1a max	1.5 mm

Calculation factors

Equivalent dynamic radial load

$P = X.Fr + Y.Fa$

$Fa / Fr \leq e$		$Fa / Fr > e$	
X	Y	X	Y
1	0	0.4	Y2

Equivalent static radial load

$Po = Xo.Fr + Yo.Fa$

X_0	Y_0
0.5	Y0

If $Po < Fr$, then use $Po = Fr$

The values for e, Y2 and Y0 are shown in the above table