Technical data


6004LLUNR/5K

Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, snap ring & groove on outer diameter, contact seals on both sides

Visual(s)

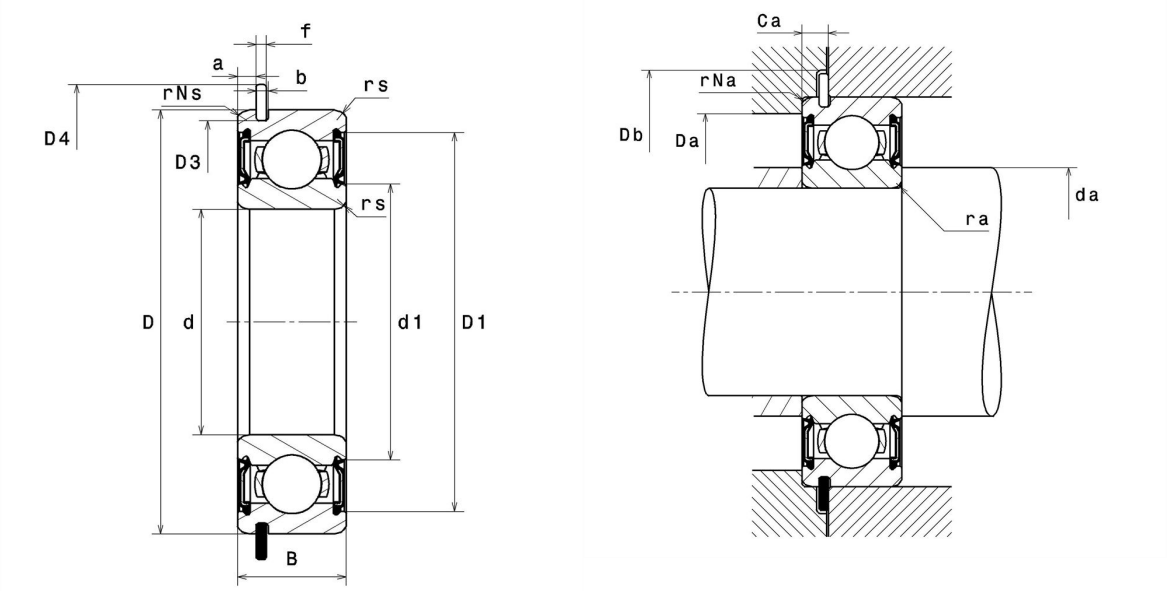

Product definition

d	20 mm
D	42 mm
B	12 mm
a min	1.9 mm
a max	2.06 mm
Ca min	2.92 mm
Ca max	3.18 mm
rs min	0.6 mm
rNs min	0.5 mm
D3 max	39.75 mm
b min	1.35 mm
b max	1.65 mm
r0 max	0.4 mm
D4 max	46.3 mm
f	1.12 mm
Snap ring reference	R42
Radial clearance class	CN
Mass	0.07 kg
Brand	NTN

Product performance

Dynamic load, C	9.4 kN
Static load, C0	5.05 kN
Fatigue limit load, Cu	0.23 kN
f0	13.9
Nlim (grease)	11,000 Tr/min
Min operating temperature, Tmin	-25 °C
Max operating temperature, Tmax	110 °C
Characteristic cage frequency, FTF	0.4 Hz
Characteristic rolling element frequency, BSF	4.76 Hz
Characteristic outer ring frequency, BPF0	3.59 Hz
Characteristic inner ring frequency, BPFI	5.41 Hz

Abutment dimensions

da min	24 mm
da max	26 mm
Da max	38 mm
ra max	0.6 mm
rNa max	0.5 mm
Db min	47 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr