Technical data


6005LLUNRC3/5K

Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, snap ring & groove on outer diameter, contact seals on both sides

Visual(s)

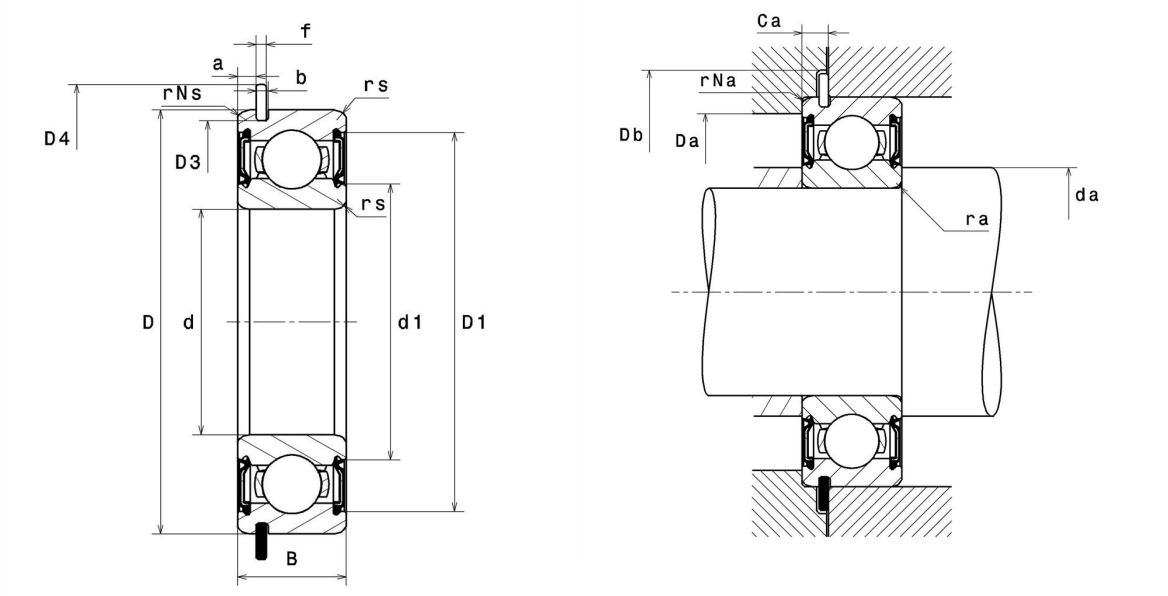

Product definition

d	25 mm
D	47 mm
B	12 mm
a min	1.9 mm
a max	2.06 mm
Ca min	3.02 mm
Ca max	3.18 mm
rs min	0.6 mm
rNs min	0.5 mm
D3 max	44.6 mm
b min	1.35 mm
b max	1.65 mm
r0 max	0.4 mm
D4 max	52.7 mm
f	1.12 mm
Snap ring reference	R47
Radial clearance class	C3
Mass	0.08 kg
Brand	NTN

Product performance

Dynamic load, C	10.1 kN
Static load, C0	5.85 kN
Fatigue limit load, Cu	0.27 kN
f0	14.5
Nlim (grease)	9,400 Tr/min
Min operating temperature, Tmin	-25 °C
Max operating temperature, Tmax	110 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.49 Hz
Characteristic outer ring frequency, BPF0	4.12 Hz
Characteristic inner ring frequency, BPFI	5.88 Hz

Abutment dimensions

da min	29 mm
da max	30.5 mm
Da max	43 mm
ra max	0.6 mm
rNa max	0.5 mm
Db min	53.5 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr