
Technical data


6015ZNR

Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, snap ring & groove on outer diameter, shield on one side

Visual(s)

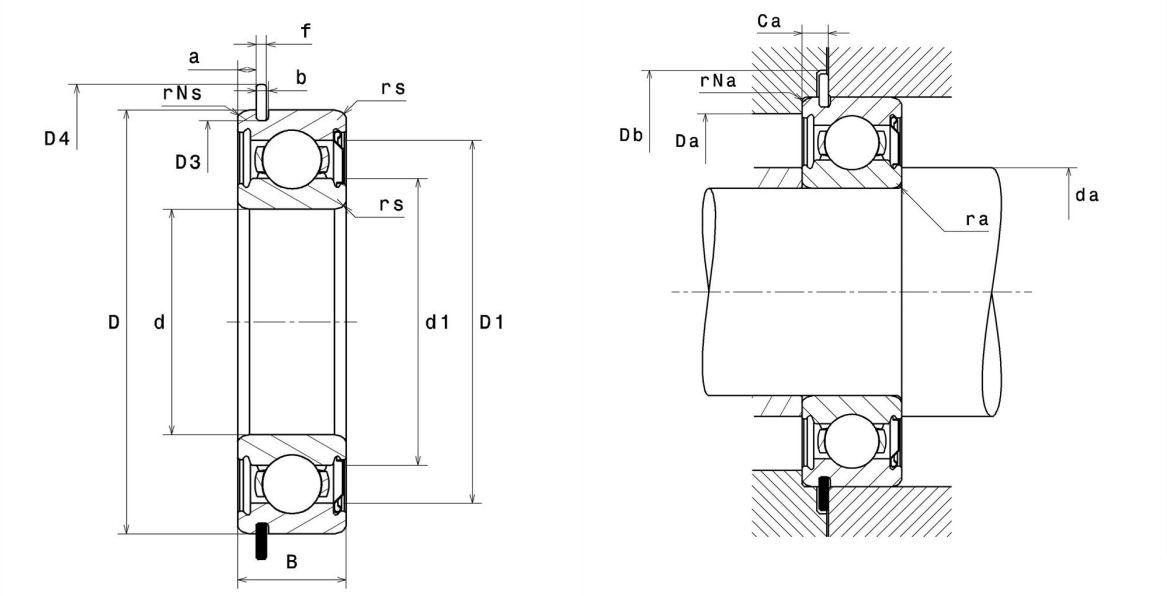

Product definition

d	75 mm
D	115 mm
B	20 mm
a min	2.67 mm
a max	2.87 mm
Ca min	5.13 mm
Ca max	5.33 mm
rs min	1.1 mm
rNs min	0.5 mm
D3 max	111.81 mm
b min	2.7 mm
b max	3 mm
r0 max	0.6 mm
D4 max	121.6 mm
f	2.46 mm
Snap ring reference	R115
Radial clearance class	CN
Mass	0.65 kg
Brand	NTN

Product performance

Dynamic load, C	39.5 kN
Static load, C0	33.5 kN
Fatigue limit load, Cu	1.52 kN
f0	15.8
Nlim (oil)	6,700 Tr/min
Nlim (grease)	5,700 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.85 Hz
Characteristic outer ring frequency, BPF0	6.56 Hz
Characteristic inner ring frequency, BPFI	8.44 Hz

Abutment dimensions

da min	81.5 mm
Da max	108.5 mm
ra max	1 mm
rNa max	0.5 mm
Db min	123 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr