Technical data


6024NR

Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, snap ring & groove on outer diameter, open

Visual(s)

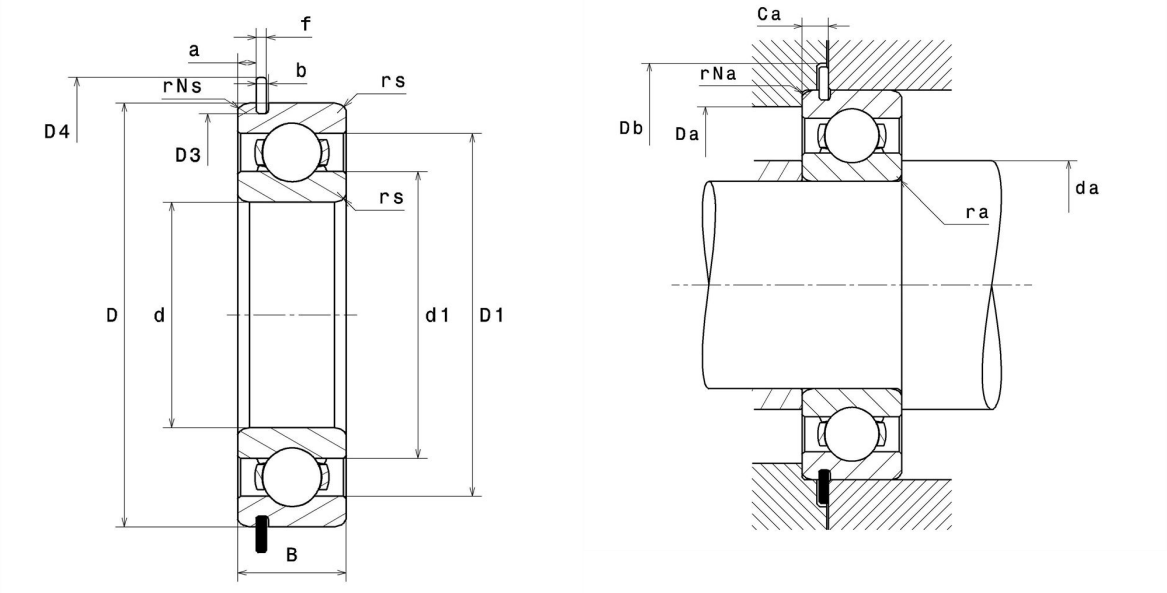

Product definition

d	120 mm
D	180 mm
B	28 mm
a min	3.45 mm
a max	3.71 mm
Ca min	6.45 mm
Ca max	6.81 mm
rs min	2 mm
rNs min	0.5 mm
D3 max	173.66 mm
b min	3.5 mm
b max	3.8 mm
r0 max	0.6 mm
D4 max	192.9 mm
f	3.1 mm
Snap ring reference	R180
Radial clearance class	CN
Mass	2.07 kg
Brand	NTN

Product performance

Dynamic load, C	85 kN
Static load, C0	79.5 kN
Fatigue limit load, Cu	2.95 kN
f0	15.9
Nlim (oil)	4,100 Tr/min
Nlim (grease)	3,500 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.1 Hz
Characteristic outer ring frequency, BPF0	6.59 Hz
Characteristic inner ring frequency, BPFI	8.41 Hz

Abutment dimensions

da min	129 mm
Da max	171 mm
ra max	2 mm
rNa max	0.5 mm
Db min	195 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr