
Technical data


6211.KEEC3

Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, tapered bore, contact seals on both sides

Visual(s)

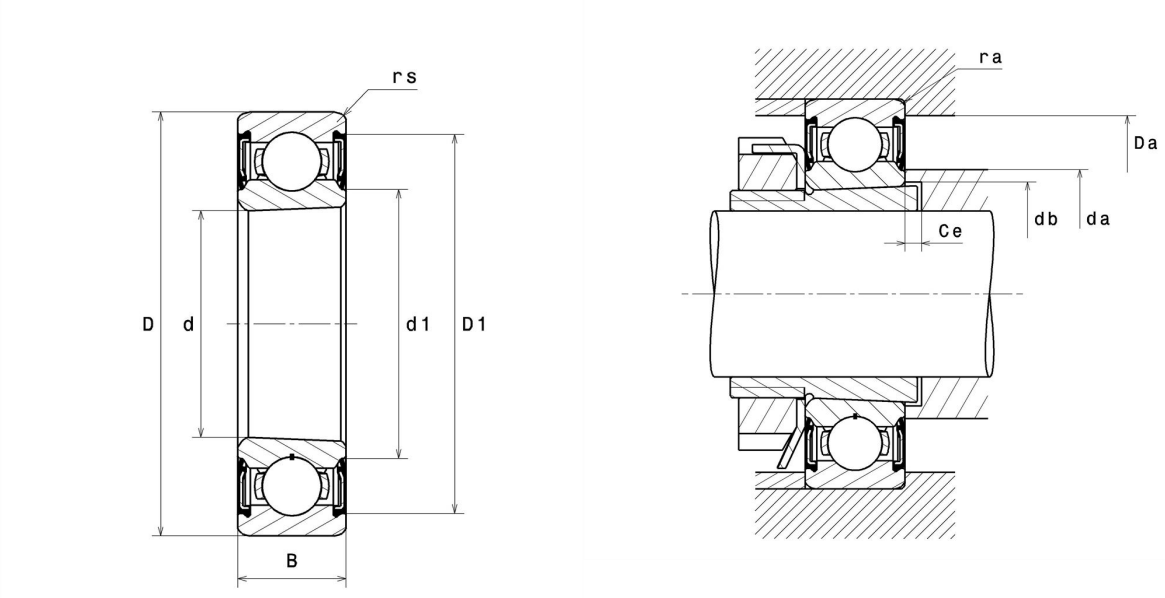

Product definition

d	55 mm
D	100 mm
B	21 mm
d1	65.4 mm
D1	90.9 mm
rs min	1.5 mm
Associated sleeve reference	H211
Radial clearance class	C3
Mass	0.6 kg
Brand	SNR

Product performance

Dynamic load, C	42.6 kN
Static load, C0	29.3 kN
Fatigue limit load, Cu	1.33 kN
f0	14.3
Nlim	4,400 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.24 Hz
Characteristic outer ring frequency, BPF0	4.08 Hz
Characteristic inner ring frequency, BPFI	5.92 Hz

Abutment dimensions

da min	63 mm
da max	65.4 mm
Ce min	0 mm
Da max	92 mm
ra max	1.5 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr