
Technical datasheet


6910ZZC3/5K

Single row deep groove ball bearings



Deep groove ball bearing, radial contact, pressed steel cage, shields on both sides

Visual(s)

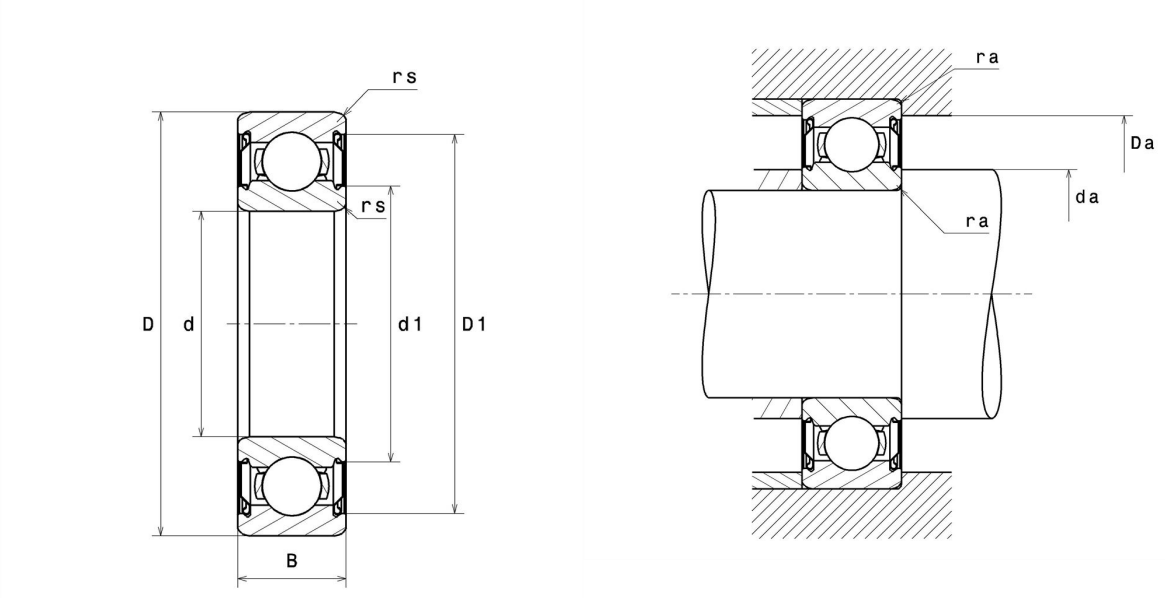

Product definition

d	50 mm
D	72 mm
B	12 mm
rs min	0.6 mm
Radial clearance class	C3
Mass	0.13 kg
Brand	NTN

Product performance

Dynamic load, C	13.4 kN
Static load, C0	11.2 kN
Fatigue limit load, Cu	0.51 kN
f0	16.3
Nlim (grease)	8,900 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	54 mm
da max	55.5 mm
Da max	68 mm
ra max	0.6 mm

Calculation factors

Equivalent dynamic radial load

P = X.Fr + Y.Fa

$\frac{f_0 F_a}{C_0}$	e	Fa / Fr ≤ e		Fa / Fr > e	
		X	Y	X	Y
0.172	0.19	1	0	0.56	2.3
0.345	0.22				1.99
0.689	0.26				1.71
1.03	0.28				1.55
1.38	0.3				1.45
2.07	0.34				1.31
3.45	0.38				1.15
5.17	0.42				1.04
6.89	0.44				1

Equivalent static radial load

Po = Xo.Fr + Yo.Fa

X_0	Y_0
0.6	0.5

For single or DT bearing arrangement :

If Po <Fr, then use Po = Fr