


Technical data

7E-HMK1215

Drawn cup needle roller bearings, opened end

Needle roller bearing, drawn cup, open end, heavy load

Visual(s)

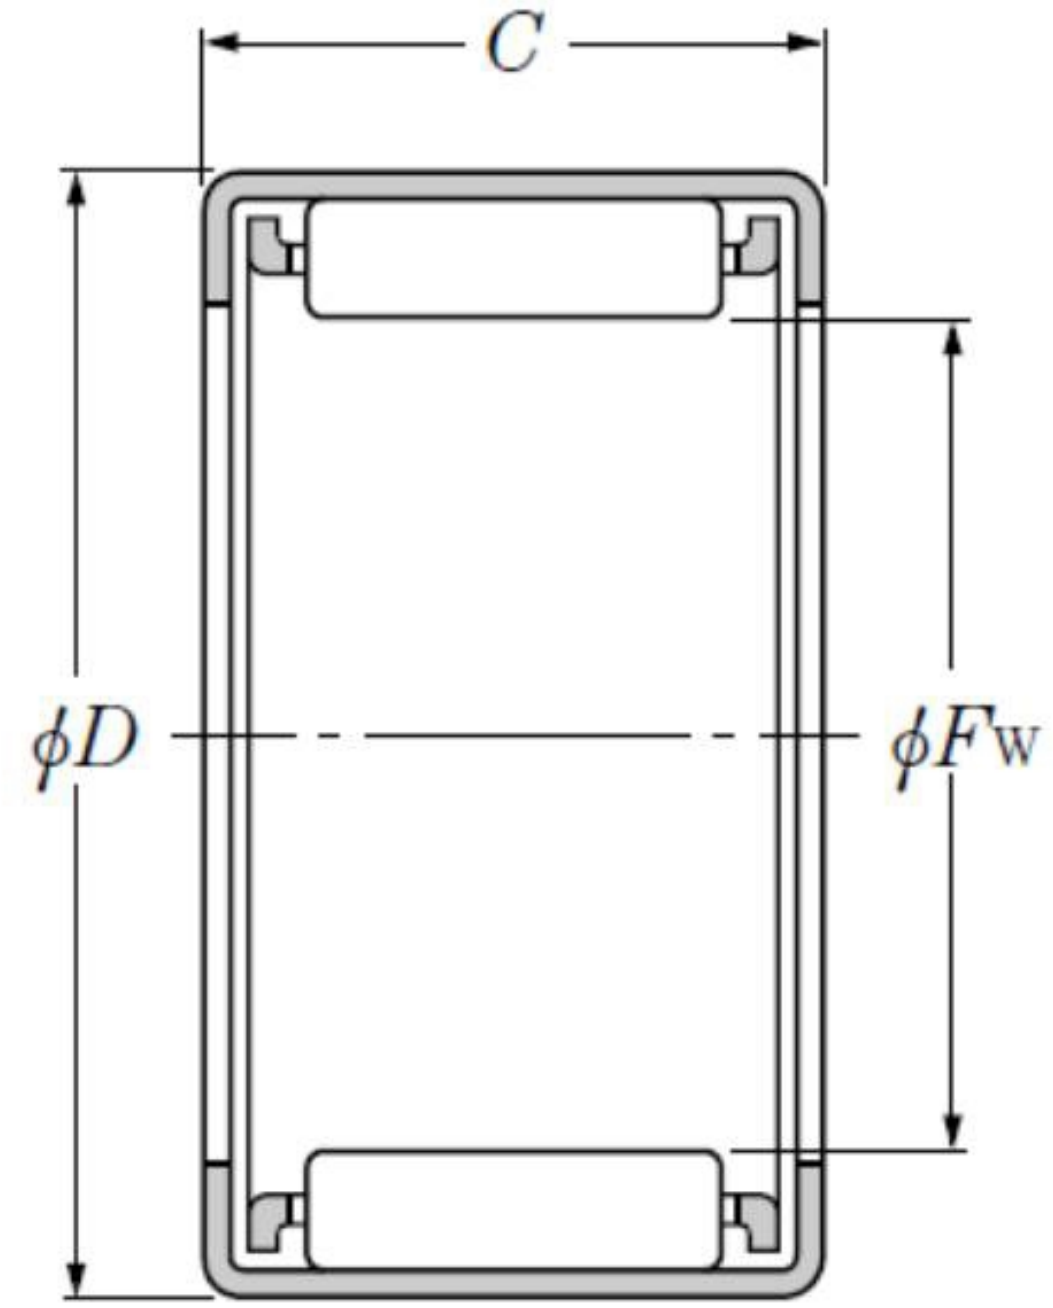

Product definition

Fw	12 mm
D	19 mm
C	15 mm
Dw	2.5 mm
Lw	10.3 mm
Lubrication hole on outer ring	Non/No
Inner ring reference	IR9X12X16
Mass	0.01 kg

Product performance

Cr	9.4 kN
C0r	9.9 kN
Nlim (grease)	13,000 Tr/min
Nlim (oil)	20,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic rolling element frequency, BSF	5.63 Hz
Characteristic outer ring frequency, BPF0	4.55 Hz
Characteristic inner ring frequency, BPFI	6.45 Hz