
Technical data


BK2512

Drawn cup needle roller bearings, closed end



Needle roller bearing, drawn cup, closed end

Visual(s)

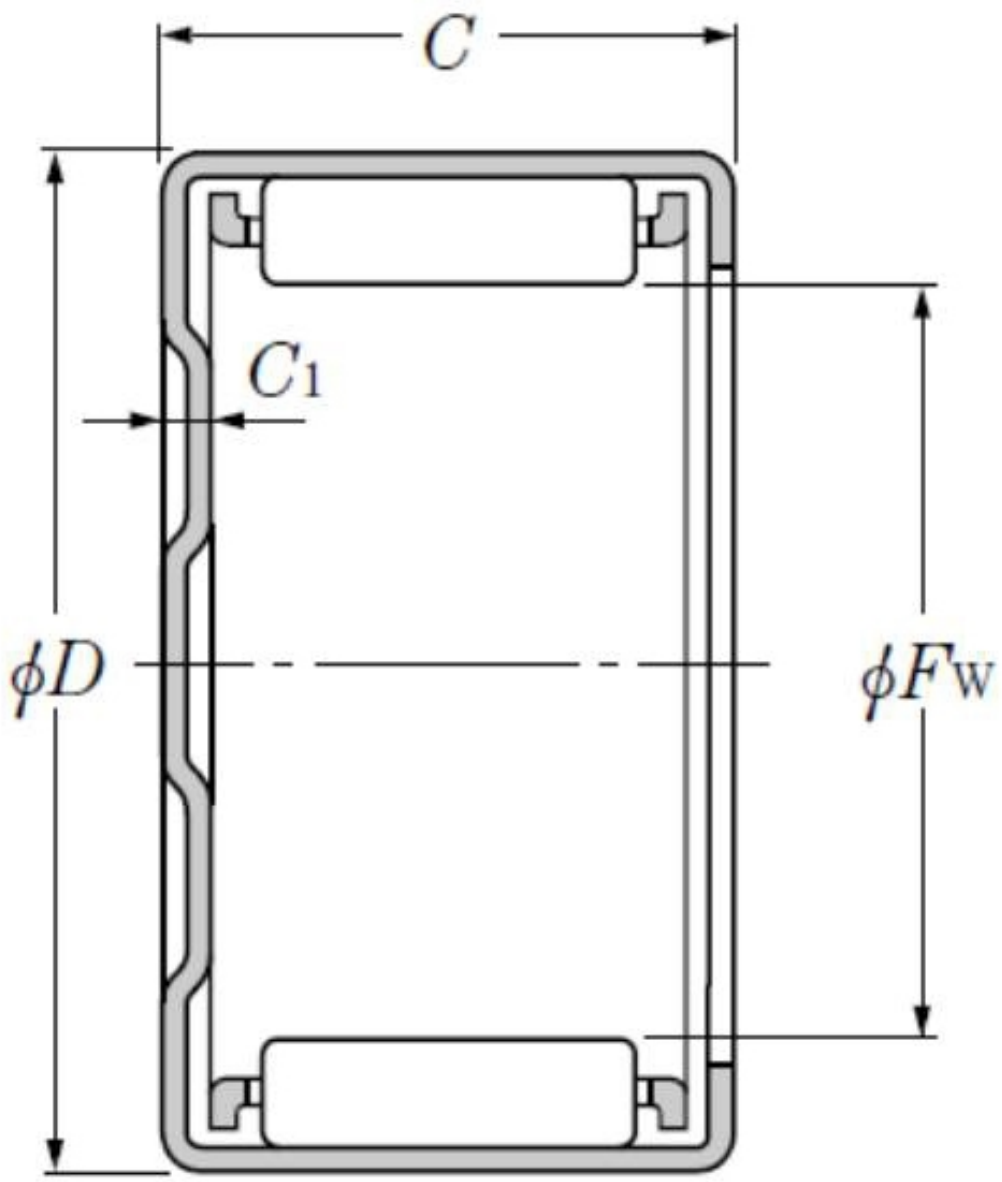

Product definition

Fw	25 mm
D	32 mm
C	12 mm
C1	2.7 mm
Dw	2.5 mm
Lw	7.8 mm
Lubrication hole on outer ring	Non/No
Inner ring reference	IR20X25X12.5
Mass	0.02 kg

Product performance

Cr	11.8 kN
C0r	16.3 kN
Nlim (grease)	6,500 Tr/min
Nlim (oil)	9,500 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	10.91 Hz
Characteristic outer ring frequency, BPF0	10 Hz
Characteristic inner ring frequency, BPFI	12 Hz