
Technical data


HK0306T2

Drawn cup needle roller bearings, opened end



Needle roller bearing, drawn cup, open end

Visual(s)

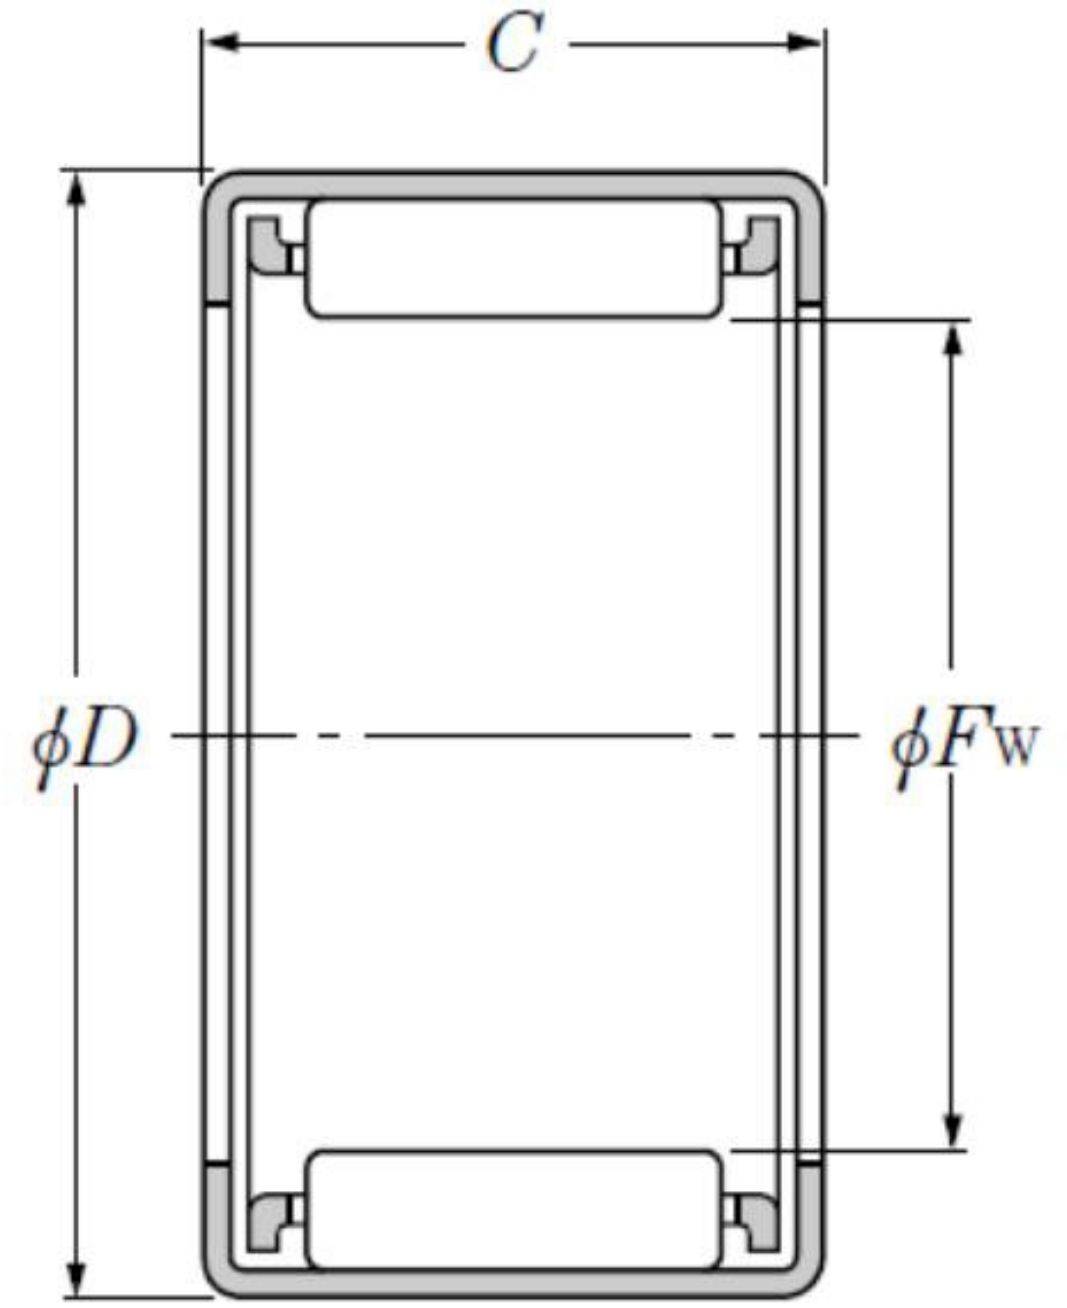

Product definition

Fw	3 mm
D	6.5 mm
C	6 mm
Dw	1.35 mm
Lw	3.8 mm
Lubrication hole on outer ring	Non/No
Inner ring reference	No
Mass	0.0006 kg

Product performance

Cr	0.92 kN
C0r	0.56 kN
Nlim (grease)	33,000 Tr/min
Nlim (oil)	50,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	100 °C
Characteristic cage frequency, FTF	0.34 Hz
Characteristic rolling element frequency, BSF	2.91 Hz
Characteristic outer ring frequency, BPF0	2.07 Hz
Characteristic inner ring frequency, BPFI	3.93 Hz