


Technical data

HK1512D

Drawn cup needle roller bearings, opened end

Needle roller bearing, drawn cup, open end

Visual(s)

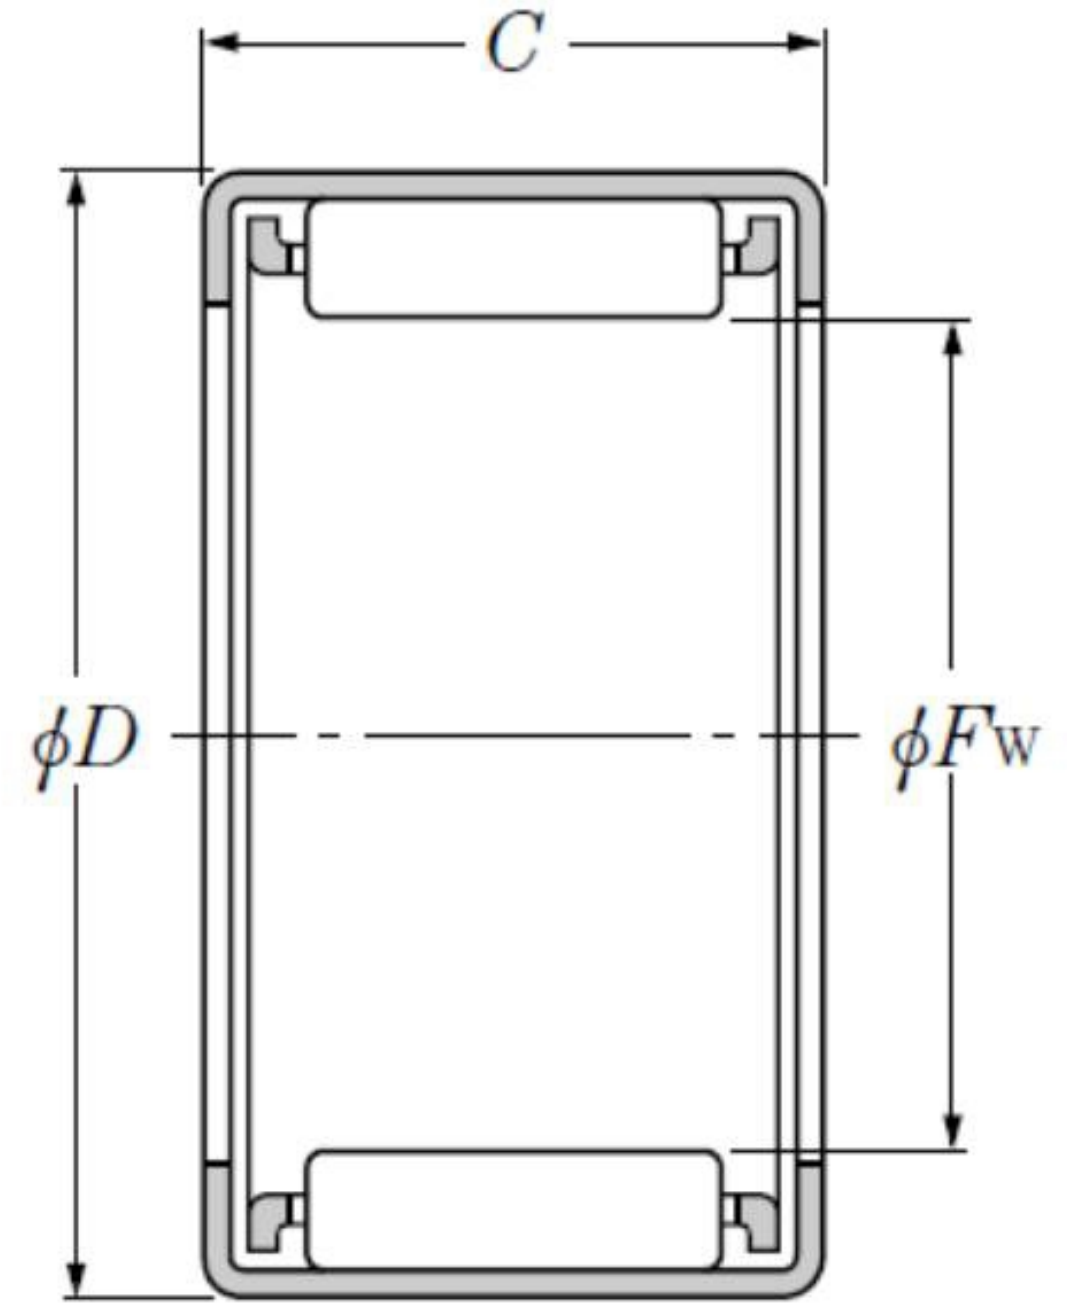

Product definition

Fw	15 mm
D	21 mm
C	12 mm
Dw	2 mm
Lw	7.3 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Inner ring reference	IR12X15X12.5
Mass	0.01 kg

Product performance

Cr	7.5 kN
C0r	9.1 kN
Nlim (grease)	11,000 Tr/min
Nlim (oil)	16,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.38 Hz
Characteristic outer ring frequency, BPF0	7.5 Hz
Characteristic inner ring frequency, BPFI	9.5 Hz