
Technical data

HL-K40X55X29.8X4T2

Needle roller and cage assemblies

Needle roller bearing, cage assembly, polyamide cage

Visual(s)

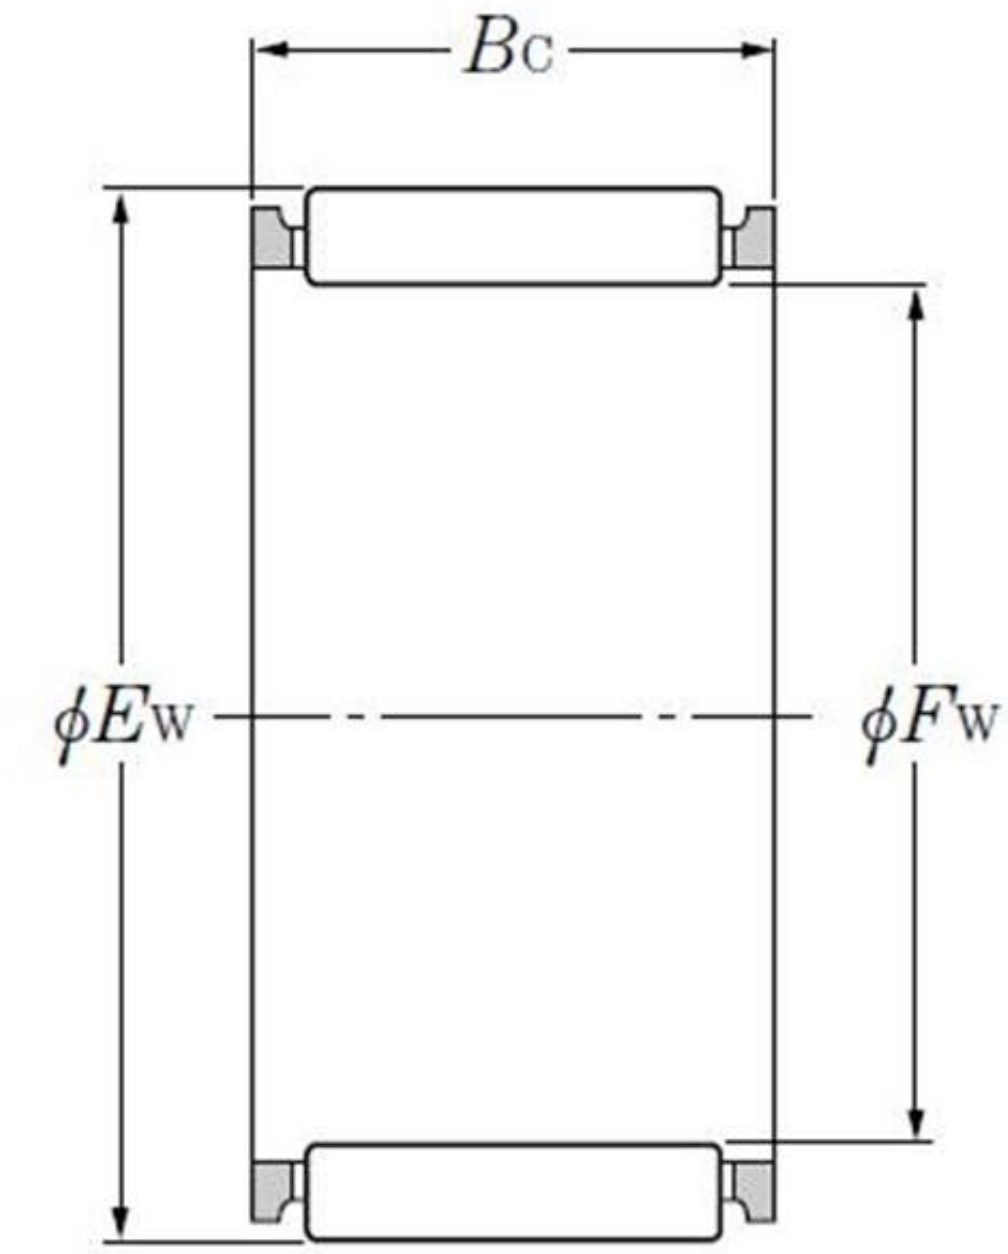

Product definition

Fw	40 mm
Ew	55 mm
Bc	30 mm
Dw	7.5 mm
Lw	25 mm
Mass	0.12 kg
Brand	NTN

Product performance

Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.42 Hz
Characteristic rolling element frequency, BSF	6.18 Hz
Characteristic outer ring frequency, BPF0	5.9 Hz
Characteristic inner ring frequency, BPFI	8.1 Hz

Abutment dimensions

b	30 mm