

Technical data

KRV22LLH2/3ASV1

Cam follower with shaft



Visual(s)

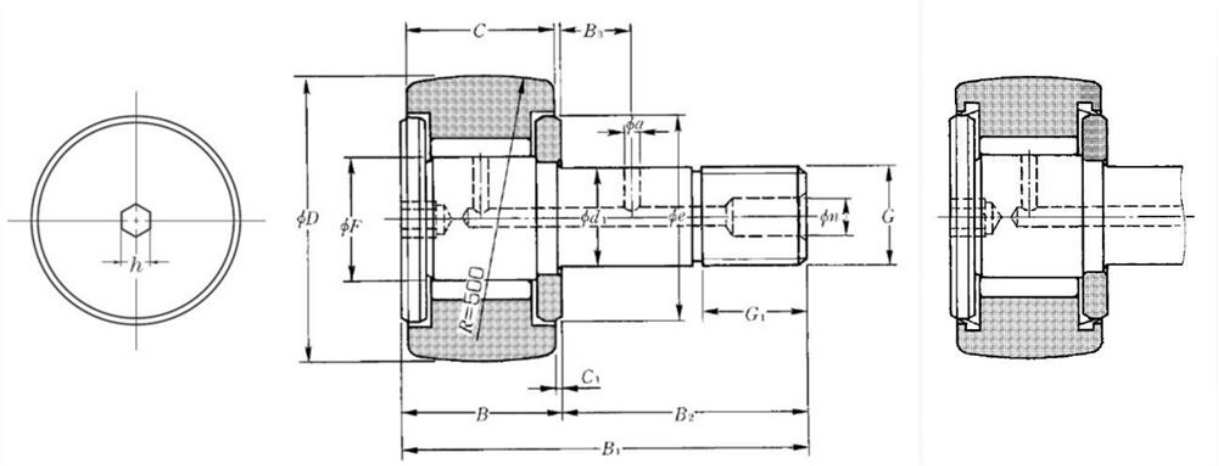

Product definition

D	22 mm
d1	10 mm
C	12 mm
F	12 mm
B	13 mm
B1	36 mm
B2	23 mm
G	M10X1.25
G1	12 mm
C1	0.6 mm
n	4 mm
e	17 mm
h	4 mm
R	500 mm
Dw	1.5 mm
Lw	8.5 mm
Maximum tightening torque	14 Nm
Bearing with/without cage	Sans
Radial clearance class	CN
Precision class	P0
Mass	0.05 kg
Brand	NTN

Product performance

Cr	8.2 kN
C0r	14 kN
Track load capacity spherical outer ring	1.69 kN
Nlim (grease)	8,500 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	100 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.89 Hz
Characteristic outer ring frequency, BPF0	12.44 Hz
Characteristic inner ring frequency, BPFI	15.56 Hz