

Technical data

KRV72LLH/3AS

Cam follower with shaft



Visual(s)

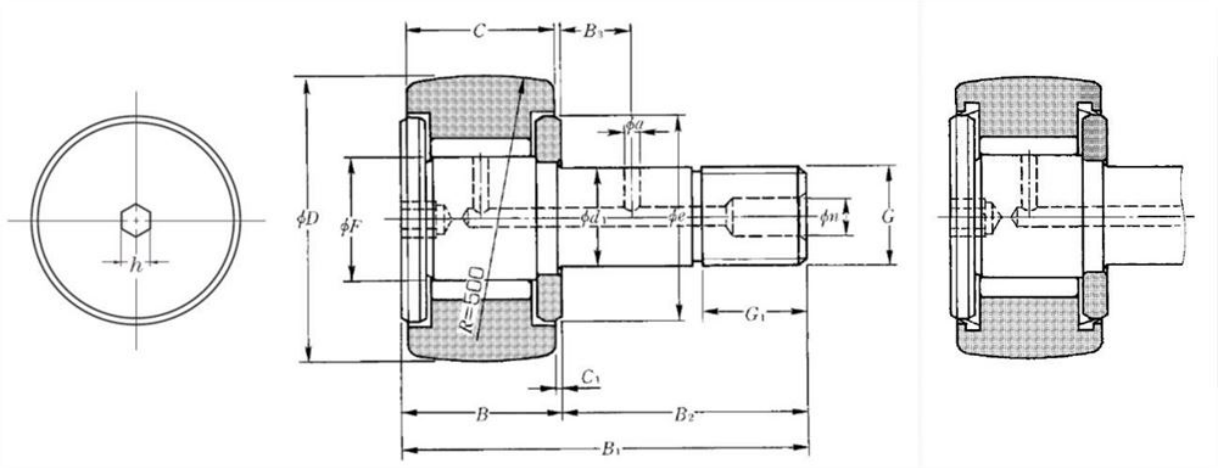

Product definition

D	72 mm
d1	24 mm
C	29 mm
F	30 mm
B	30.5 mm
B1	80 mm
B2	49.5 mm
G	M24X1.5
G1	25 mm
B3	11 mm
C1	0.8 mm
n	8 mm
a	4 mm
e	44 mm
h	8 mm
R	500 mm
Dw	2.48 mm
Lw	23.8 mm
Maximum tightening torque	178 Nm
Bearing with/without cage	Sans
Radial clearance class	CN
Precision class	P0
Mass	1.05 kg
Brand	NTN

Product performance

Cr	39.5 kN
C0r	98.5 kN
Track load capacity spherical outer ring	8.05 kN
Nlim (grease)	3,300 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	100 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	13.02 Hz
Characteristic outer ring frequency, BPF0	18.94 Hz
Characteristic inner ring frequency, BPFI	22.06 Hz