
Technical data


MR162416

Needle roller bearing, machined-ring, without inner ring



Needle roller bearing, machined-ring, without inner ring, double-side ribs, lubrication hole, inch dimensions

Visual(s)

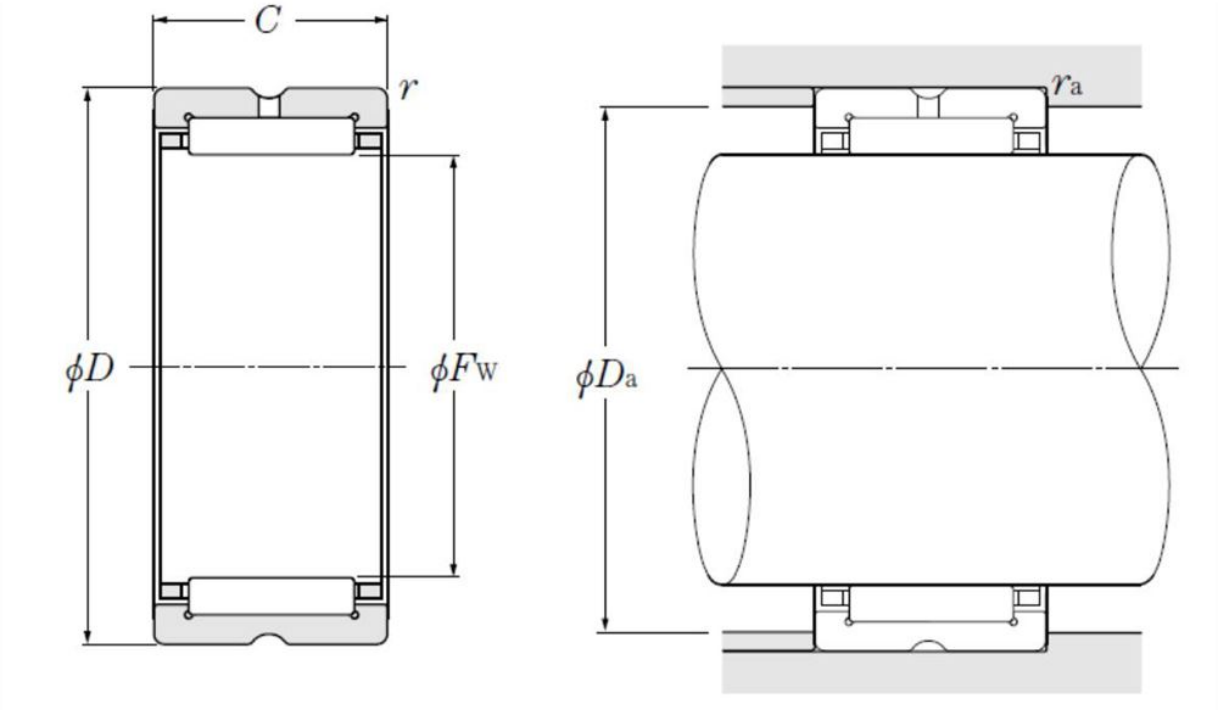

Product definition

Fw	25.4 mm
D	38.1 mm
C	25.4 mm
rs min	1 mm
Dw	4 mm
Lw	19.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Radial clearance class	CN
Precision class	P0
Mass	0.09 kg
Brand	NTN

Product performance

Cr	29.5 kN
C0r	38.5 kN
Nlim (grease)	11,000 Tr/min
Nlim (oil)	16,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.43 Hz
Characteristic rolling element frequency, BSF	7.21 Hz
Characteristic outer ring frequency, BPF0	6.05 Hz
Characteristic inner ring frequency, BPFI	7.95 Hz

Abutment dimensions

Da max	33 mm
ras max	1 mm