
Technical data


MR182616

Needle roller bearing, machined-ring, without inner ring



Needle roller bearing, machined-ring, without inner ring, double-side ribs, lubrication hole, inch dimensions

Visual(s)

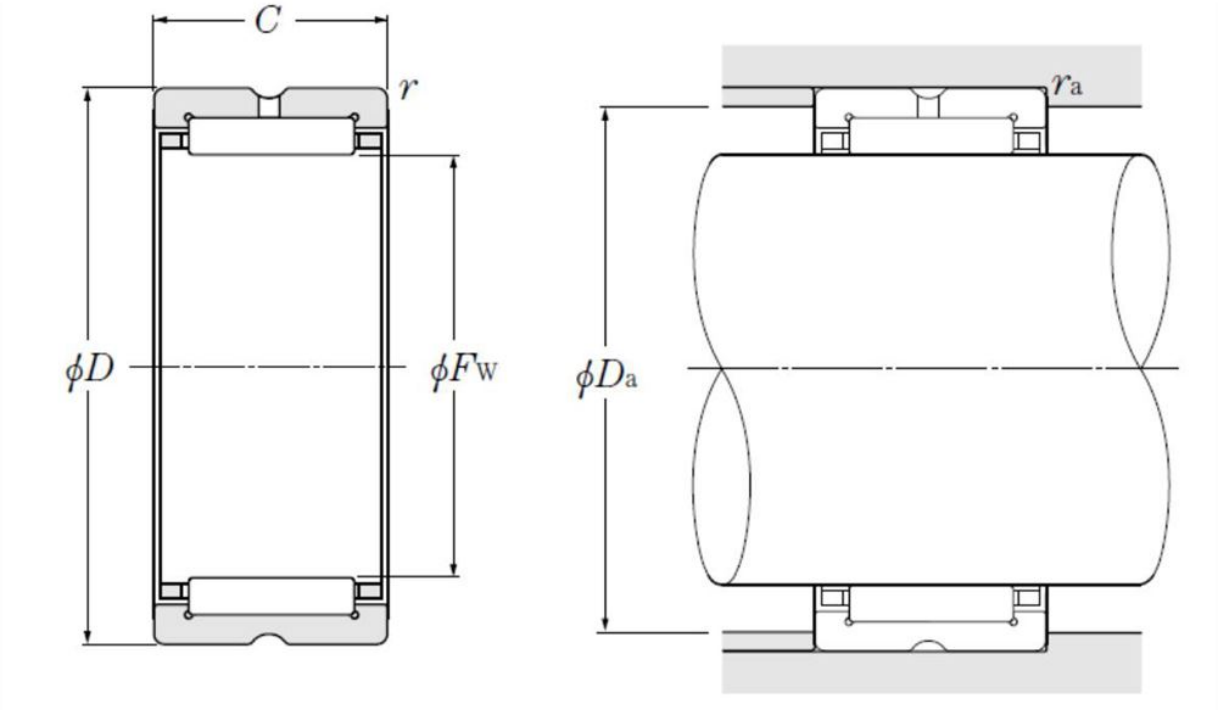

Product definition

Fw	28.58 mm
D	41.28 mm
C	25.4 mm
rs min	1 mm
Dw	4 mm
Lw	19.8 mm
Lubrication hole on outer ring	Oui/Yes
k	3 mm
Radial clearance class	CN
Precision class	P0
Mass	0.1 kg
Brand	NTN

Product performance

Cr	32.5 kN
C0r	45 kN
Nlim (grease)	9,500 Tr/min
Nlim (oil)	14,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.02 Hz
Characteristic outer ring frequency, BPF0	7.02 Hz
Characteristic inner ring frequency, BPFI	8.89 Hz

Abutment dimensions

Da max	36.5 mm
ras max	1 mm