

Technical data

MR405228

Needle roller bearing, machined-ring, without inner ring



Visual(s)

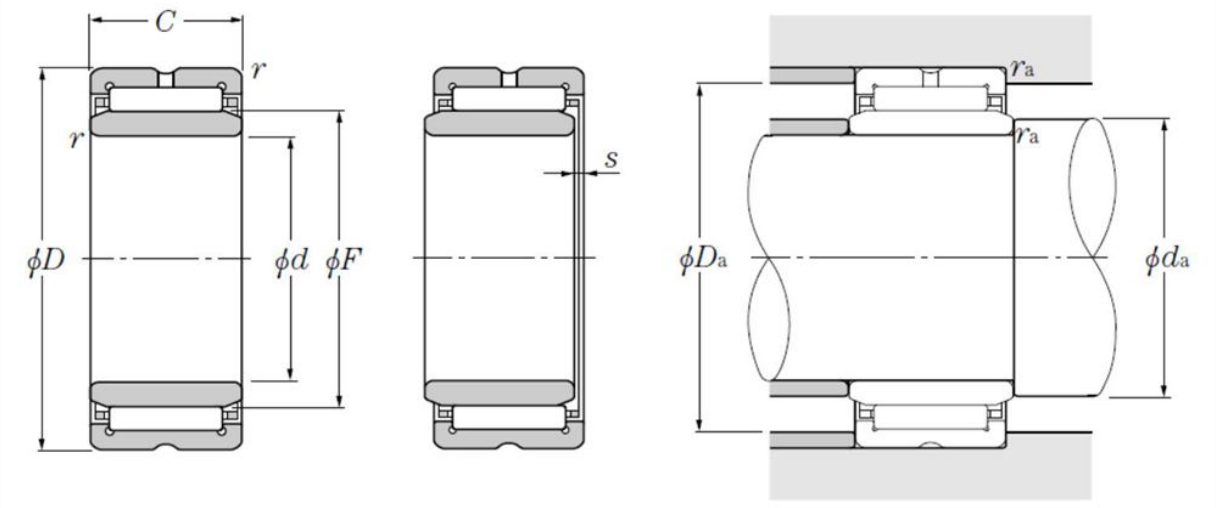

Product definition

Fw	63.5 mm
D	82.55 mm
C	44.45 mm
rs min	2 mm
Dw	6 mm
Lw	36 mm
Lubrication hole on outer ring	Oui/Yes
k	3.5 mm
Radial clearance class	CN
Precision class	P0
Mass	0.53 kg
Brand	NTN

Product performance

Cr	102 kN
C0r	191 kN
Nlim (grease)	4,300 Tr/min
Nlim (oil)	6,500 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	11.5 Hz
Characteristic outer ring frequency, BPF0	10.51 Hz
Characteristic inner ring frequency, BPFI	12.49 Hz

Abutment dimensions

Da max	74.5 mm
ras max	2 mm