# Technical data


## N212


Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage



## Visual(s)

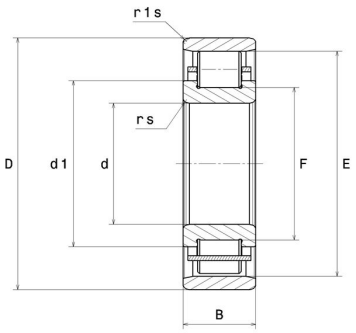

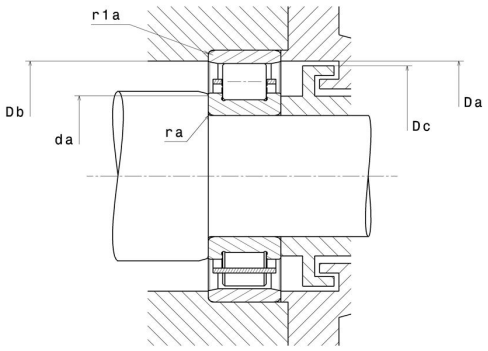
## Product definition

| | |
|---|---|
| **d** | 60 mm |
| **D** | 110 mm |
| **B** | 22 mm |
| **E** | 97.5 mm |
| **F** | 73.5 mm |
| **d1** | 78.4 mm |
| **rs min** | 1.5 mm |
| **r1s min** | 1.5 mm |
| **Radial clearance class** | CN |
| **Mass (without HJ ring)** | 0.81 kg |
| **Brand** | NTN |

## Product performance

| | |
|---|---|
| **Dynamic load, C** | 68.5 kN |
| **Static load, C0** | 75 kN |
| **Fatigue limit load, Cu** | 9.1 kN |
| **Nlim (oil)** | 7,600 Tr/min |
| **Nlim (grease)** | 6,400 Tr/min |
| **Min operating temperature, Tmin** | -40 °C |
| **Max operating temperature, Tmax** | 120 °C |

## Abutment dimensions

| | |
|---|---|
| **da min** | 68 mm |
| **Da max** | 102 mm |
| **Db min** | 100 mm |
| **Dc max** | 96 mm |
| **ra max** | 1.5 mm |
| **r1a max** | 1.5 mm |

## Calculation factors

Equivalent dynamic radial load

P = Fr

Equivalent static radial load

Po = Fr