

# Technical data

## NATR15XLL/3AS

Roller follower with inner ring



## Visual(s)

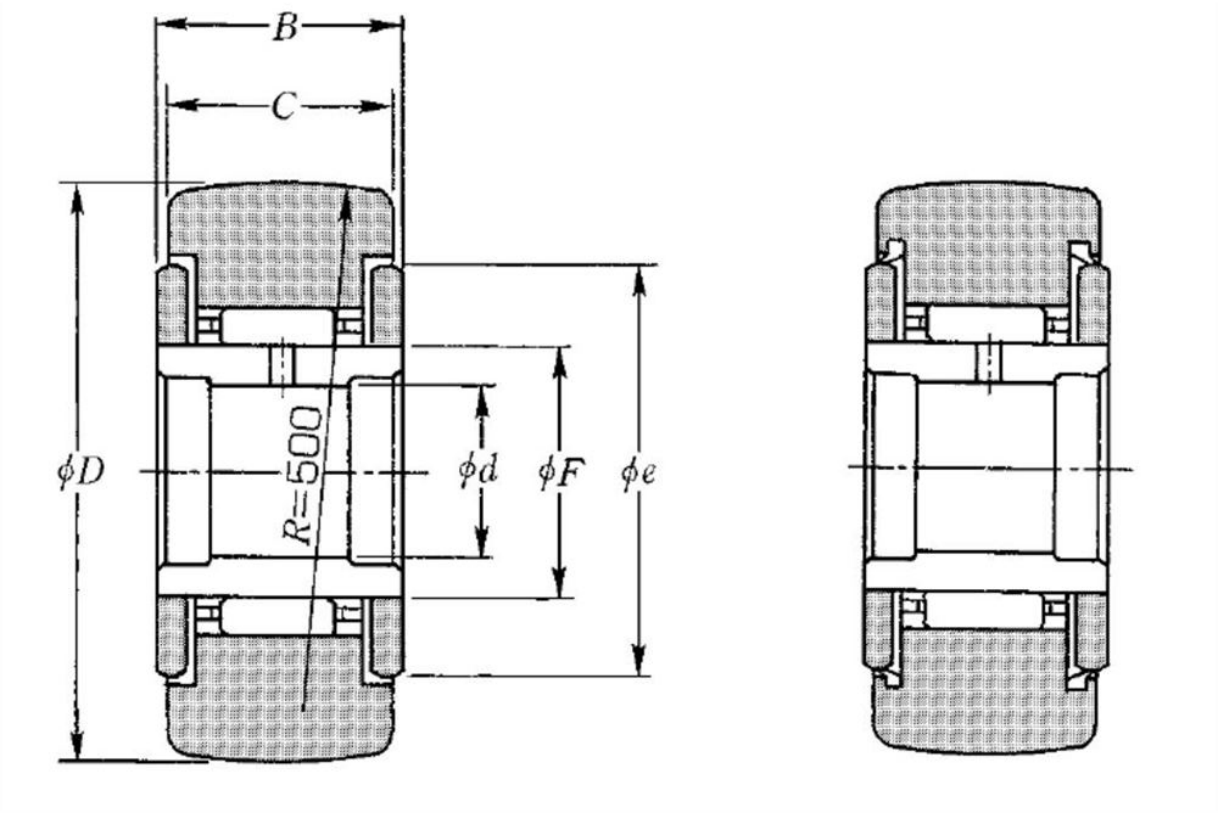


## Product definition

| | |
|---|---|
| **d** | 15 mm |
| **D** | 35 mm |
| **C** | 18 mm |
| **F** | 20 mm |
| **B** | 19 mm |
| **e** | 27 mm |
| **Dw** | 2 mm |
| **Lw** | 11.8 mm |
| **Bearing with/without cage** | Avec |
| **Radial clearance class** | CN |
| **Precision class** | P0 |
| **Mass** | 0.1 kg |
| **Brand** | NTN |

## Product performance

| | |
|---|---|
| **Cr** | 13.3 kN |
| **C0r** | 20.8 kN |
| **Track load capacity cylindrical outer ring** | 11.9 kN |
| **Nlim (grease)** | 7,500 Tr/min |
| **Min operating temperature, Tmin** | -20 °C |
| **Max operating temperature, Tmax** | 100 °C |
| **Characteristic cage frequency, FTF** | 0.46 Hz |
| **Characteristic rolling element frequency, BSF** | 10.91 Hz |
| **Characteristic outer ring frequency, BPF0** | 10 Hz |
| **Characteristic inner ring frequency, BPFI** | 12 Hz |