
Technical datasheet


NATV17X/3AS

Roller follower with inner ring



Needle roller bearing, roller follower, full-complement roller, with inner ring, cylindrical outer ring

Visual(s)

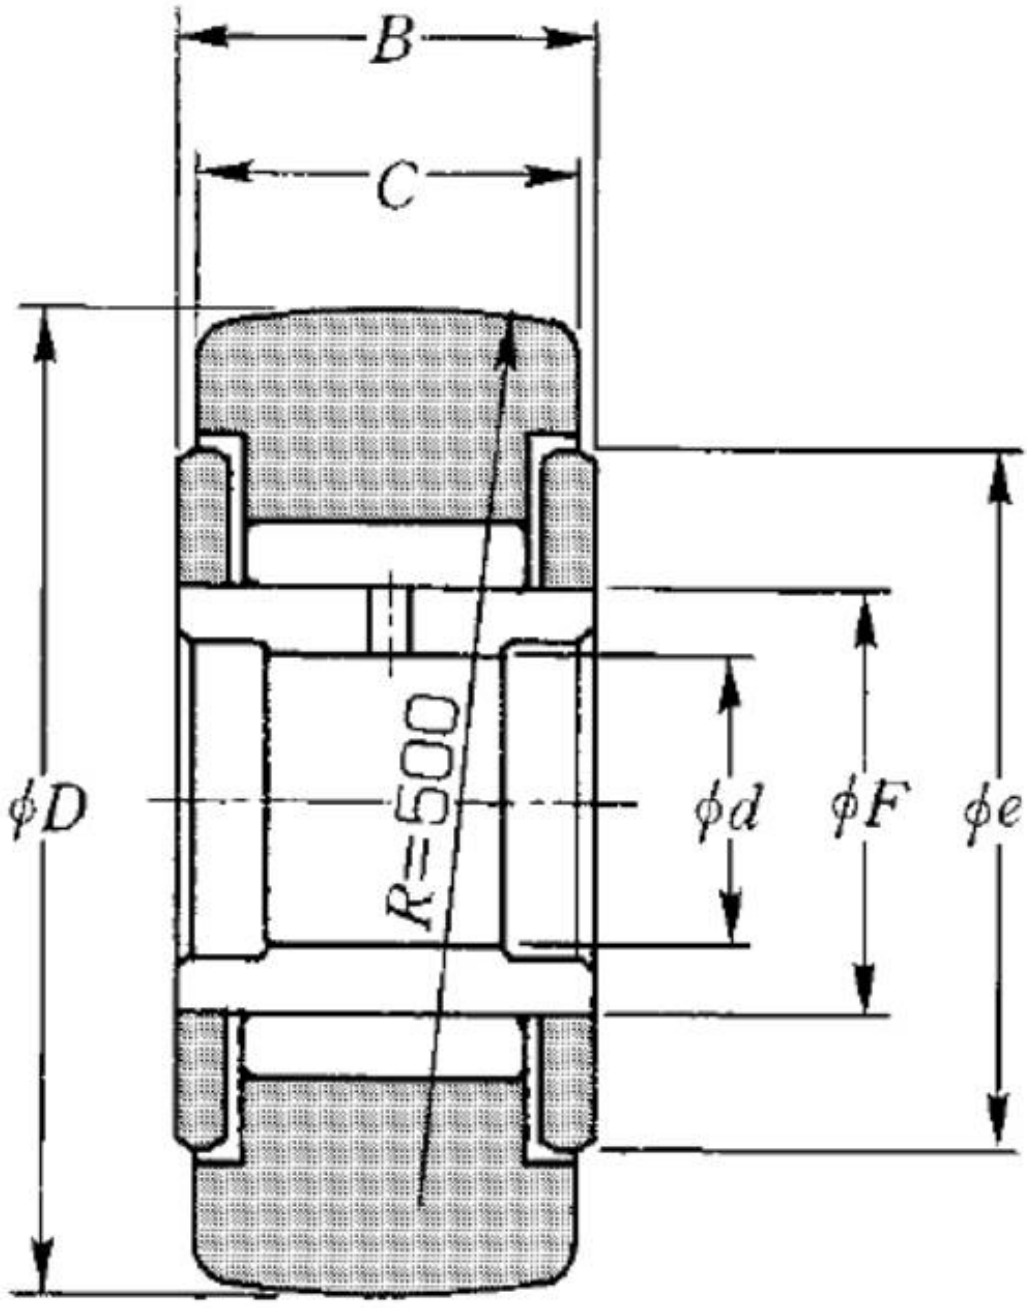

Product definition

d	17 mm
D	40 mm
C	20 mm
F	22 mm
B	21 mm
e	32 mm
Dw	1.98 mm
Lw	13.8 mm
Bearing with/without cage	Sans
Radial clearance class	CN
Precision class	P0
Mass	0.14 kg
Brand	NTN

Product performance

Cr	19.4 kN
C0r	42 kN
Track load capacity cylindrical outer ring	14.5 kN
Nlim (grease)	4,500 rpm
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	12.03 Hz
Characteristic outer ring frequency, BPF0	17.43 Hz
Characteristic inner ring frequency, BPFI	20.57 Hz