
Technical data


NK10/12T2+1R7X10X12

Needle roller bearing, machined-ring, with inner ring



Needle roller bearing, machined-rings, with inner ring, double-side plates, lubrication hole

Visual(s)

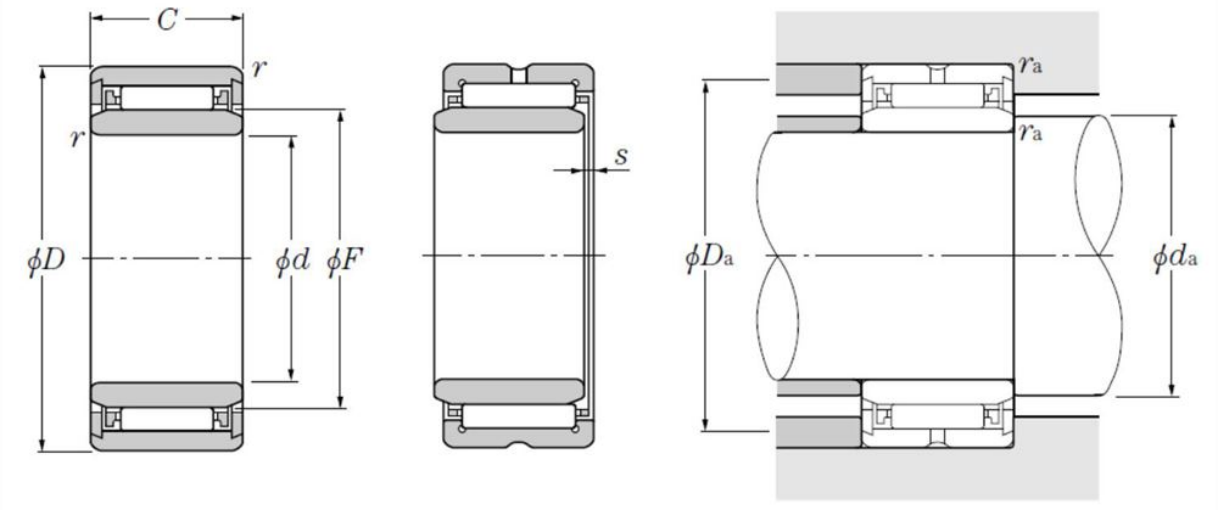

Product definition

d	7 mm
D	17 mm
C	12 mm
F	10 mm
rs min	0.3 mm
s max	1.5 mm
Dw	1.5 mm
Lw	7.8 mm
Lubrication hole on outer ring	Non/No
Inner ring reference	1R7X10X12
Lubrication hole on inner ring	Non/No
Radial clearance class	CN
Precision class	P0
Mass	0.01 kg
Brand	NTN

Product performance

Cr	4.55 kN
C0r	5.1 kN
Nlim (grease)	19,000 Tr/min
Nlim (oil)	28,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	100 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.54 Hz
Characteristic outer ring frequency, BPF0	5.22 Hz
Characteristic inner ring frequency, BPFI	6.78 Hz

Abutment dimensions

da min	9 mm
Da max	11.5 mm
ras max	0.3 mm