
Technical data


NK25/20RCT

Needle roller bearing, machined-ring, without inner ring



Needle roller bearing, machined-ring, without inner ring, double-side ribs, lubrication hole

Visual(s)

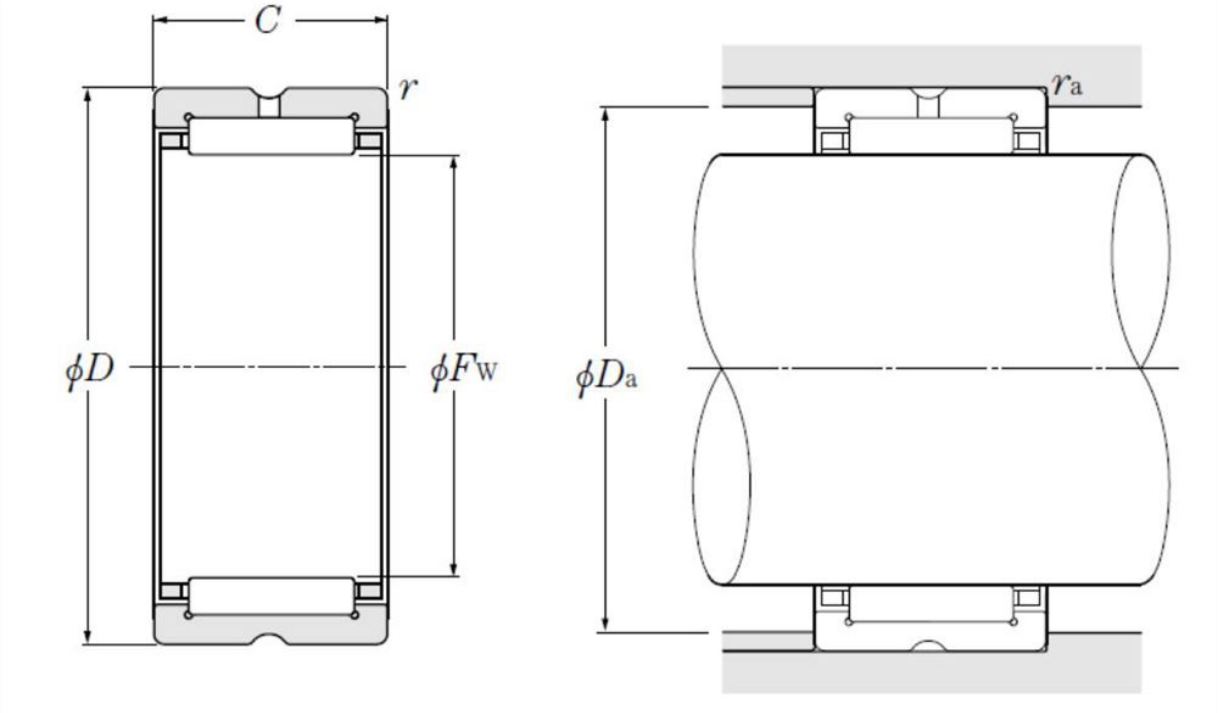

Product definition

Fw	25 mm
D	33 mm
C	20 mm
rs min	0.3 mm
Dw	2.5 mm
Lw	16.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Radial clearance class	CN
Precision class	P0
Mass	0.04 kg
Brand	NTN

Product performance

Cr	19.2 kN
C0r	30.5 kN
Nlim (grease)	11,000 Tr/min
Nlim (oil)	16,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	10.91 Hz
Characteristic outer ring frequency, BPF0	9.09 Hz
Characteristic inner ring frequency, BPFI	10.91 Hz

Abutment dimensions

Da max	31 mm
ras max	0.3 mm