
Technical data


NK30/20R

Needle roller bearing, machined-ring, without inner ring



Needle roller bearing, machined-ring, without inner ring, double-side ribs, lubrication hole

Visual(s)

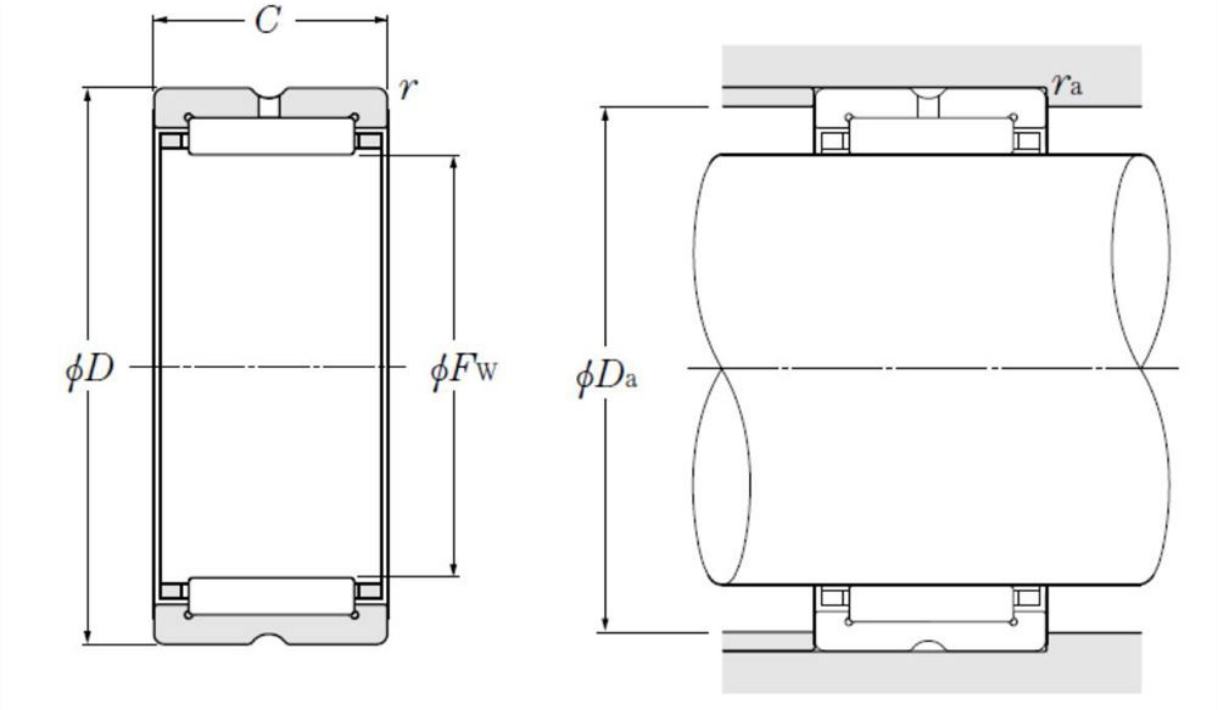

Product definition

Fw	30 mm
D	40 mm
C	20 mm
rs min	0.3 mm
Dw	3 mm
Lw	15.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Radial clearance class	CN
Precision class	P0
Mass	0.06 kg
Brand	NTN

Product performance

Cr	22.1 kN
C0r	34 kN
Nlim (grease)	8,500 Tr/min
Nlim (oil)	13,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.46 Hz
Characteristic rolling element frequency, BSF	10.91 Hz
Characteristic outer ring frequency, BPF0	9.09 Hz
Characteristic inner ring frequency, BPFI	10.91 Hz

Abutment dimensions

Da max	38 mm
ras max	0.3 mm