
Technical data


NK45/30RCT

Needle roller bearing, machined-ring, without inner ring



Needle roller bearing, machined-ring, without inner ring, double-side ribs, lubrication hole

Visual(s)

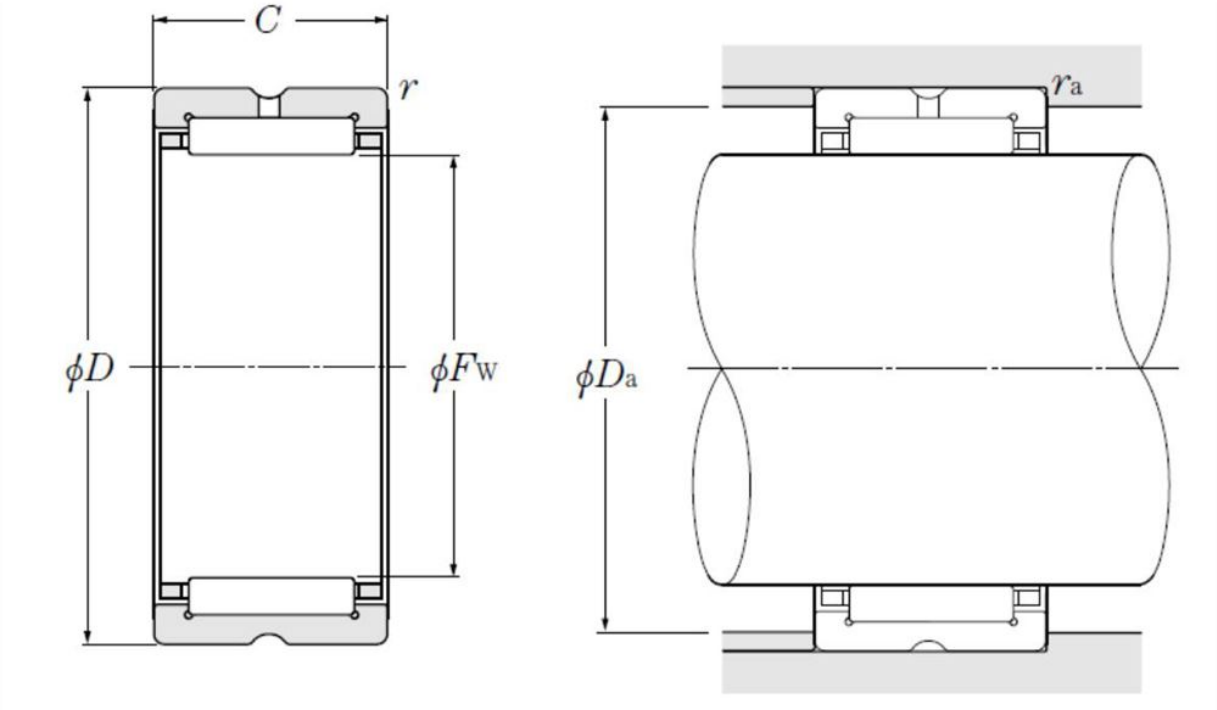

Product definition

Fw	45 mm
D	55 mm
C	30 mm
rs min	0.3 mm
Dw	3 mm
Lw	25.4 mm
Lubrication hole on outer ring	Oui/Yes
k	3 mm
Radial clearance class	CN
Precision class	P0
Mass	0.14 kg
Brand	NTN

Product performance

Cr	41 kN
C0r	85.5 kN
Nlim (grease)	6,000 Tr/min
Nlim (oil)	9,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.47 Hz
Characteristic rolling element frequency, BSF	15.94 Hz
Characteristic outer ring frequency, BPF0	13.59 Hz
Characteristic inner ring frequency, BPFI	15.41 Hz

Abutment dimensions

Da max	53 mm
ras max	0.3 mm