

Technical data


NKXR17T2

Combined bearings



Visual(s)

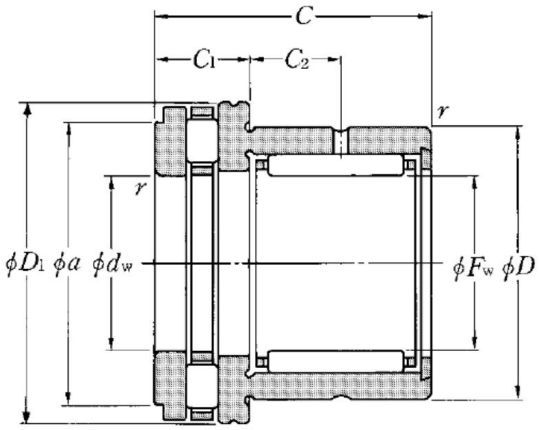

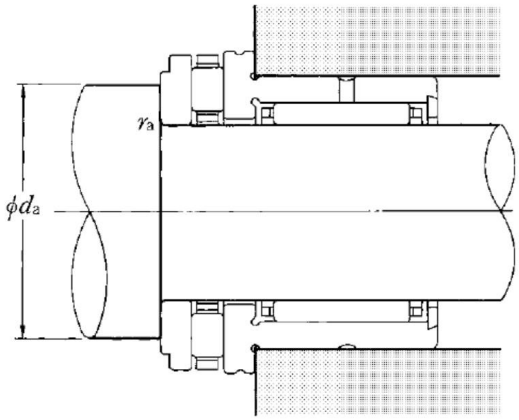

Product definition

Fw	17 mm
dw	17 mm
D	26 mm
D1	30 mm
C	25 mm
C1	9 mm
C2	8 mm
a	25.7 mm
rs min	0.3 mm
Dw	2 mm
Dw1	3.5 mm
Lw	11.8 mm
Lubrication hole on outer ring	Oui/Yes
k	2.5 mm
Precision class	P0
Mass	0.05 kg
Brand	NTN

Product performance

Cr	10.4 kN
Ca	12.7 kN
C0r	14.4 kN
C0a	29 kN
Nlim (grease)	2,500 Tr/min
Nlim (oil)	10,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	27 mm
ras max	0.3 mm