# Technical data


## NU211C3

Single row cylindrical roller bearings

Single row cylindrical roller bearing, floating, separable, pressed steel cage



## Visual(s)

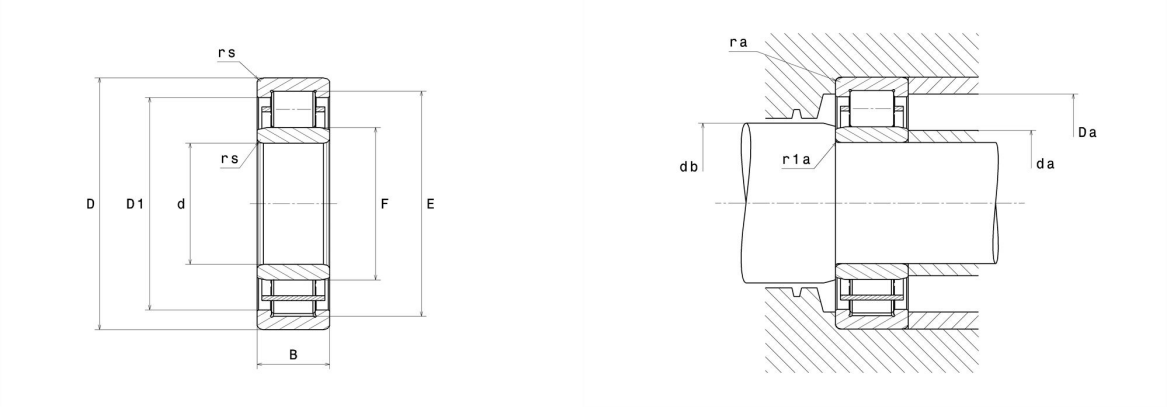


## Product definition

| | |
|---|---|
| **d** | 55 mm |
| **D** | 100 mm |
| **B** | 21 mm |
| **E** | 88.5 mm |
| **F** | 66.5 mm |
| **rs min** | 1.5 mm |
| **r1s min** | 1.1 mm |
| **Radial clearance class** | C3 |
| **Mass (without HJ ring)** | 0.64 kg |
| **Brand** | NTN |

## Product performance

| | |
|---|---|
| **Dynamic load, C** | 58 kN |
| **Static load, C0** | 62.5 kN |
| **Fatigue limit load, Cu** | 7.6 kN |
| **Nlim (oil)** | 8,200 Tr/min |
| **Nlim (grease)** | 6,900 Tr/min |
| **Min operating temperature, Tmin** | -40 °C |
| **Max operating temperature, Tmax** | 120 °C |

## Abutment dimensions

| | |
|---|---|
| **da min** | 61.5 mm |
| **da max** | 65 mm |
| **db min** | 68 mm |
| **Da max** | 92 mm |
| **ra max** | 1.5 mm |
| **r1a max** | 1 mm |

## Calculation factors

Equivalent dynamic radial load

P = Fr

Equivalent static radial load

Po = Fr