Technical data


NU2318


Single row cylindrical roller bearings



Single row cylindrical roller bearing, floating, separable, pressed steel cage

Visual(s)

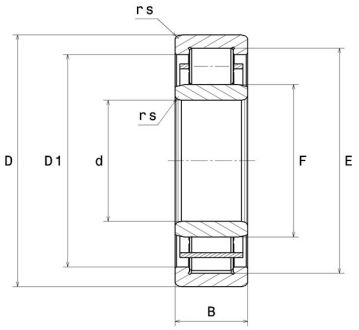

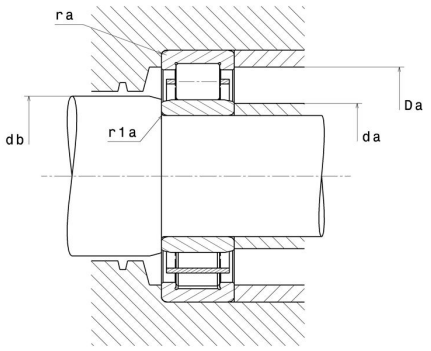

Product definition

d	90 mm
D	190 mm
B	64 mm
E	165 mm
F	115 mm
rs min	3 mm
r1s min	3 mm
Radial clearance class	CN
Mass (without HJ ring)	8.1 kg
Brand	NTN

Product performance

Dynamic load, C	325 kN
Static load, C0	395 kN
Fatigue limit load, Cu	43.5 kN
Nlim (oil)	3,800 Tr/min
Nlim (grease)	3,200 Tr/min
Min operating temperature, Tmin	-40 °C
Max operating temperature, Tmax	120 °C

Abutment dimensions

da min	103 mm
da max	111 mm
db min	117 mm
Da max	177 mm
ra max	2.5 mm
r1a max	2.5 mm

Calculation factors

Equivalent dynamic radial load

P = Fr

Equivalent static radial load

Po = Fr