


Technical data

RNA0-10X17X10T2

Needle roller bearing, machined-ring, separable, without inner ring

Needle roller bearing, machined-ring, separable, without inner ring

Visual(s)

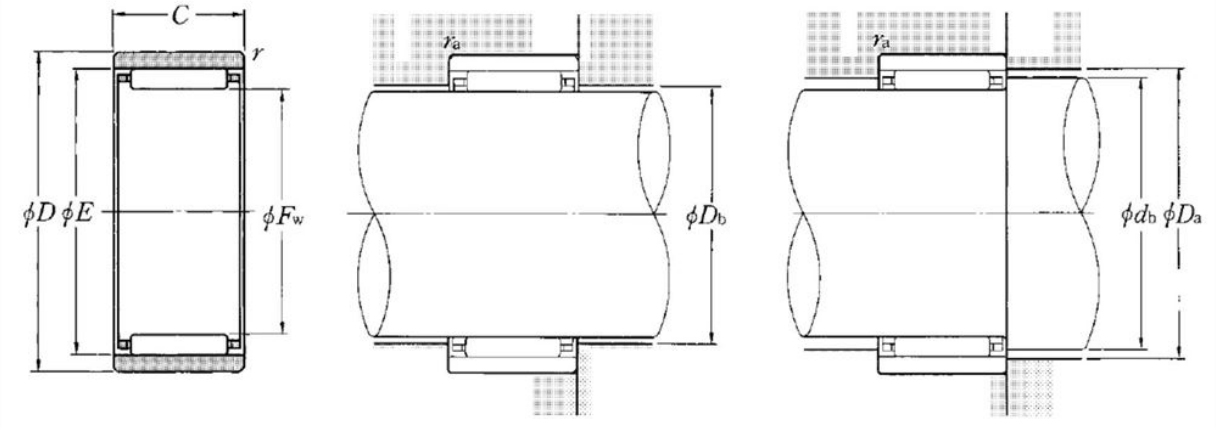

Product definition

Fw	10 mm
D	17 mm
C	10 mm
E	13 mm
rs min	0.3 mm
Dw	1.5 mm
Lw	7.8 mm
Lubrication hole on outer ring	Non/No
Radial clearance class	CN
Precision class	P0
Mass	0.01 kg
Brand	NTN

Product performance

Cr	4.55 kN
C0r	5.1 kN
Nlim (grease)	19,000 Tr/min
Nlim (oil)	28,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	100 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	7.54 Hz
Characteristic outer ring frequency, BPF0	5.22 Hz
Characteristic inner ring frequency, BPFI	6.78 Hz

Abutment dimensions

db	12.7 mm
Da max	15 mm
Db	10.3 mm
ras max	0.3 mm