
Technical data


RNA49/28RCT

Needle roller bearing, machined-ring, without inner ring



Needle roller bearing, machined-ring, without inner ring, double-side ribs, lubrication hole

Visual(s)

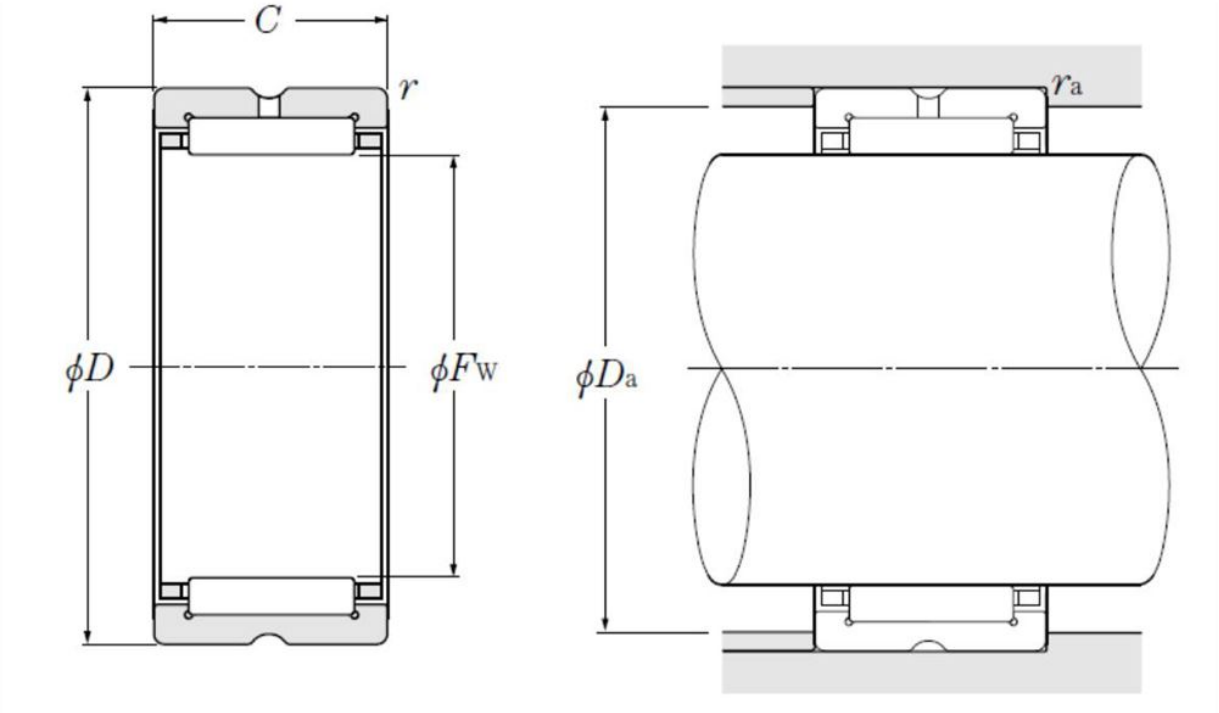

Product definition

Fw	32 mm
D	45 mm
C	17 mm
rs min	0.3 mm
Dw	4 mm
Lw	12.8 mm
Lubrication hole on outer ring	Oui/Yes
k	3 mm
Radial clearance class	CN
Precision class	P0
Mass	0.07 kg
Brand	NTN

Product performance

Cr	24.8 kN
C0r	33.5 kN
Nlim (grease)	8,500 Tr/min
Nlim (oil)	13,000 Tr/min
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.44 Hz
Characteristic rolling element frequency, BSF	8.89 Hz
Characteristic outer ring frequency, BPF0	8.44 Hz
Characteristic inner ring frequency, BPFI	10.56 Hz

Abutment dimensions

Da max	43 mm
ras max	0.3 mm